



Ceiling Concealed



Ceiling Concealed with Plenum

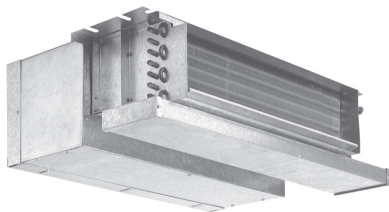

Ceiling Recessed

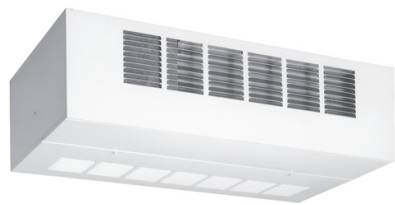

Ceiling Exposed

HBC SERIES-PSC MOTOR
HBCX SERIES-ECM MOTOR

Horizontal

300-1200 CFM

- Ceiling Concealed
- Ceiling Recessed
- Ceiling Exposed

- **HIGH EFFICIENCY**
- **HIGH PERFORMANCE**

ECM Motor Options

The ECM motor option includes 24V controls, a constant torque, permanent magnet, brushless DC motor, with 4 discrete speed taps that allow for high static applications and precise air balancing

MERV 8

LOUVERED ACCESS PANELS


Page 29



AE-Air
 P.O. Box 270969
 Dallas, TX 75227
 Ph. (214)-388-5751
 www.ae-air.com

Table of Contents	2	Blower Performance Tables (PSC Motor)	
Nomenclature	2	120/1/60	
Features	3	HBC	13
Physical Data	4-7	PHBC (With Plenum)	14
Cooling Performance	8-10	RHBC (Recessed with Panel)	15
Heating Performance	11	277/1/60	
Correction Factors	12	HBC	16
Blower Performance PSC Motor	13-22	PHBC (With Plenum)	17
Blower Performance ECM Motor	23-26	RHBC (Recessed with Panel)	18
Guide Specifications	27-28	220/1/50	
Access/Filter Panels	29	HBC	19
Accessories	30-31	PHBC (With Plenum)	20
		RHBC (Recessed with Panel)	21
		CHBC (Cabinet Exposed) All Voltages	22
		Blower Performance Tables (ECM Motor)	
		(120/1/60)	
		HBCX	23
		PHBCX	24
		RHBCX	25
		CHBCX	26
		HBCX	23
		PHBCX	24
		RHBCX	25
		CHBCX	26
		HBCX	25
		CHBCX	26

MODEL NOMENCLATURE

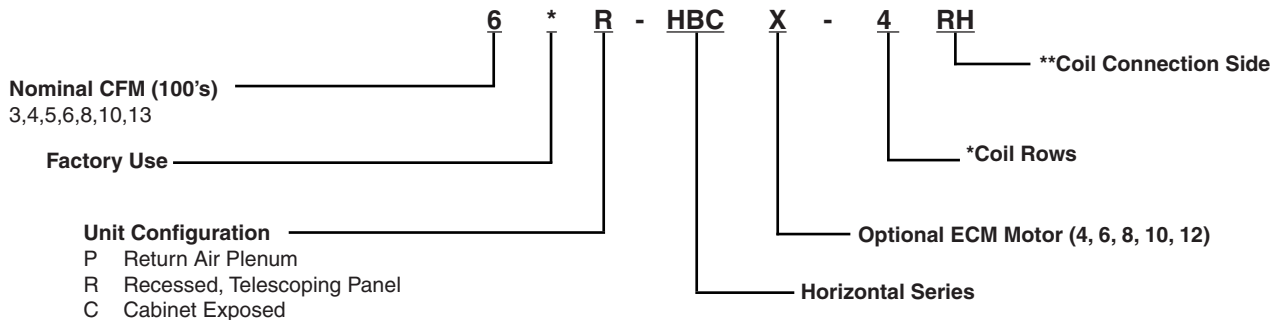

****Coil Connection Side**

RH Right Hand (default)
LH Left Hand
Hand connection is determined by looking with airflow

***Coil Configurations**

Rows	Description
3	2-Pipe 3 Row
4	2-Pipe 4 Row
31	4-Pipe 3 Row Cooling, 1-Row Hot Water
32	4-Pipe 3 Row Cooling, 2-Row Hot Water
41	4-Pipe 4 Row Cooling, 1-Row Hot Water

Available Voltage (PSC Motors)

120V/1/60
208-230V/1/60
220V/1/50
277V/1/60

Available Voltage (ECM Motors)

120V/1/60



NEW! ECM Motor Option

This new ECM motor option includes 24V controls, a constant torque, permanent magnet, brushless DC motor, with 4 discrete speed taps that allow for precise air balancing.

Standard Features

Basic Unit - All fan coils are manufactured with heavy gauge galvanized steel to resist corrosion. All models are approved for installation with "0" clearance to combustible material.

Insulation - Plenums and cabinets are insulated with Tuf-Skin dual density fiber glass blanket insulation with an anti-microbial agent.

Ceiling Panels - Hinged access/return panels are manufactured with heavy gauge galvanized steel with captive mounting screws and an attractive white baked powder finish.

Condensate Pans - Positive sloped drain pans are galvanized steel, coated on the inside surface with a U.L. Listed closed cell, fire retardant, foam insulation. Pan includes both primary and secondary drain connections.

Return Air Plenums - Return air plenums are manufactured from galvanized steel insulated with Tuf-Skin dual density fiber glass blanket insulation and a 1" TA fiber glass filter.

Coils - Constructed with seamless copper tubes and headers. The tubes are mechanically expanded into corrugated aluminum fin material for a permanent primary to secondary surface bond. Coils are tested under water at 350 PSI for operation at 300 PSI. Coils include manual air vents.

Fan Wheels-Housing - are double width, double inlet (DWDI) forward curved, centrifugal type. Wheels are statically and dynamically balanced for smooth, quiet operation. The housing is constructed from heavy gauge galvanized steel with die-formed inlet cones.

Motors - Standard motors are PSC, permanently lubricated type with internal thermal overload protection.

Options


Factory mounted options include ECM motors 120V only, stainless steel drain pans, foil faced cabinet insulation, Multi-24 3-speed 24V control, valve packages, thermostats, aqua stats, service switches. 120V, 208V/240V, 277V, 60hz and (220/50hz, PSC MOTORS ONLY)



*Factory use
(X) Denotes with ECM motor


*HBC(X) Series - Ceiling Concealed

The * HBC series is designed for fully concealed applications. This 10" high space saving unit provides easy access for service and maintenance.




*PHBC(X) Series - Ceiling Concealed with Plenum

The * HBC series is designed for fully concealed applications. This 10" high space saving unit provides easy access for service and maintenance.




*RHBC(X) Series - Ceiling Recessed

includes adjustable hinged access/return panel with 1" TA fiber glass filter. The cabinet allows for a field mounted rear return duct connection by using a solid access panel.



*CHBC(X) Series - Ceiling Recessed



cabinet with an attractive baked powder finish. Cabinet includes stamped discharge opening and hinged bottom panel with 1" TA fiber glass filter.




Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

***HBC
PHYSICAL DATA**

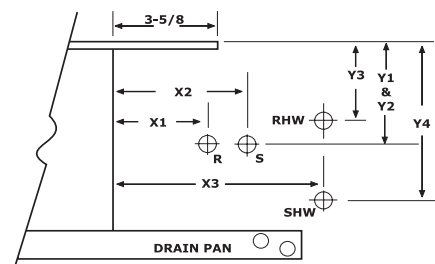


LEFT HAND MODEL SHOWN

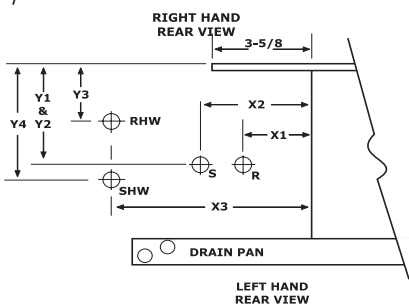


LEFT HAND REAR VIEW

RIGHT SIDE

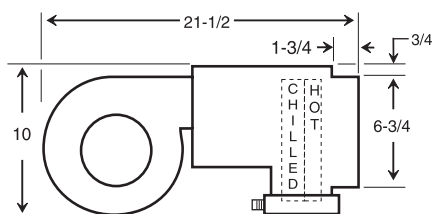

4 - PIPE UNIT SHOWN

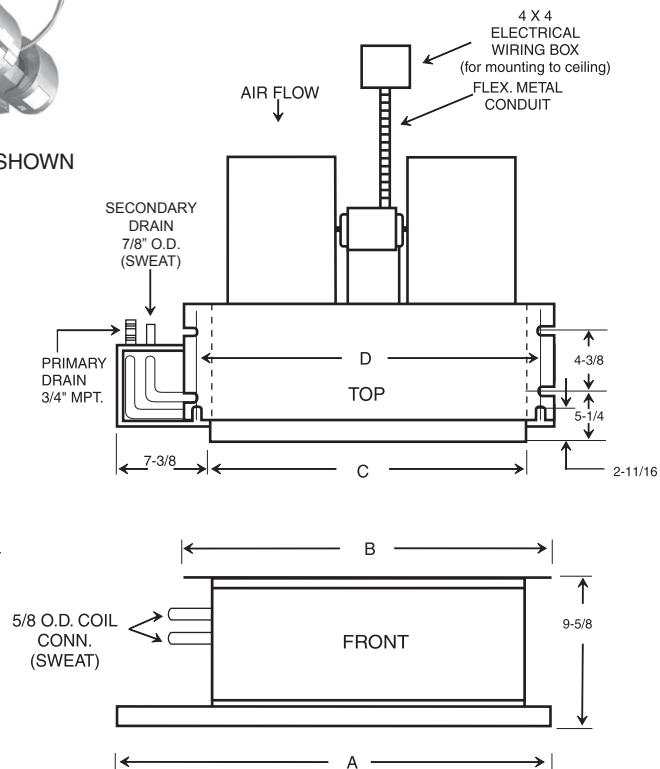

NOTE: RIGHT HAND MODEL SHOWN - LEFT HAND MODEL HAS DRAIN AND PIPING CONNECTIONS ON OPPOSITE SIDE OF FAN COIL.

GENERAL DIMENSIONS				
MODEL	A	B	C	D
3*HBC	30-1/8	27-1/4	20-1/8	25-1/4
4*HBC(X)	36-1/8	33-1/4	26-1/8	31-1/4
5*HBC	40-1/8	37-1/4	30-1/8	35-1/4
6*HBC(X)	40-1/8	37-1/4	30-1/8	35-1/4
8*HBC(X)	46-1/8	43-1/4	36-1/8	41-1/4
10*HBC(X)	52-1/8	49-1/4	42-1/8	47-1/4
12*HBC(X)	59-1/8	56-1/4	49-1/8	54-1/4
13*HBC	59-1/8	56-1/4	49-1/8	54-1/4

(X)- Available with ECM motor

NOTES:

- 1) ALL DIMENSIONS IN INCHES.
- 2) COIL CONNECTION TOLERANCE $\pm 1/4"$.
- 3) RIGHT HAND UNIT SHOWN, LEFT HAND MIRROR IMAGE.
(HAND IS DETERMINED BY FACING THE BLOWER END)

OPTIONAL FIELD MOUNTED RETURN AIR PLENUM KITS			
PART NO	FOR MODEL NO.	DIMENSIONS (H X W X D)	SHIP WT.
916-1-STK	3*HBC	10 X 24 X 12-1/2	18
916-2-STK	4*HBC(X)	10 X 30 X 12-1/2	22
916-3-STK	5*HBC	10 X 34 X 12-1/2	22
916-3-STK	6*HBC(X)	10 X 34 X 12-1/2	22
916-4-STK	8*HBC(X)	10 X 40 X 12-1/2	24
916-5-STK	10*HBC(X)	10 X 46 X 12-1/2	27
916-6-STK	13*HBC	10 X 53 X 12-1/2	30


HBC HEADER LOCATIONS							
RIGHT HAND	X1	Y1	X2	Y2	X3	Y3	Y4
3 ROW	3	4-1/4	5	4	---	---	---
3/1 Split	3	4-1/4	5	4	8	3-1/2	5-1/2
3/2 Split	3	4-1/4	5	4	8	3-1/2	5-1/2
4 ROW	3	4-1/4	5	4	---	---	---
4/1 Split	3	4-1/4	5	4	8	4	6

HBC HEADER LOCATIONS							
LEFT HAND	X1	Y1	X2	Y2	X3	Y3	Y4
3 ROW	3	3-3/4	5	4	---	---	---
3/1 Split	3	3-3/4	5	4	8	2-1/2	4-1/2
3/2 Split	3	3-3/4	5	4	8	2-1/2	4-1/2
4 ROW	3	3-3/4	5	4	---	---	---
4/1 Split	3	3-3/4	5	4	8	2	4


Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic


***PHBC
PHYSICAL DATA**

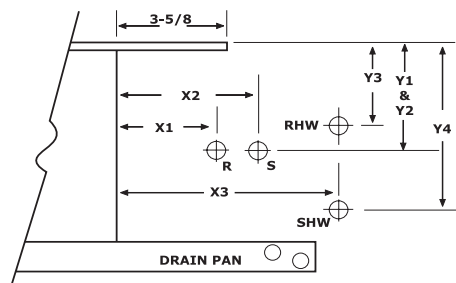

RIGHT HAND REAR VIEW

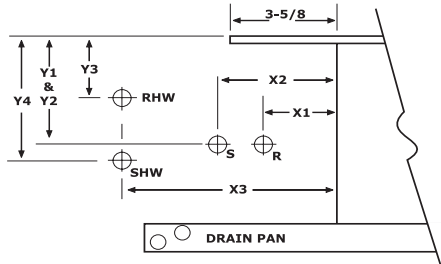


LEFT HAND REAR VIEW




NOTES:

1. Return plenums are insulated.
2. All plenums include throw-away filter.
3. Standard plenums are end return and can be field converted to bottom return.
4. Filter has separate access panel.

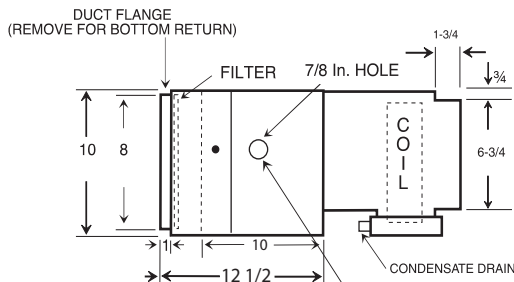


RIGHT SIDE

ELECTRICAL KNOCKOUTS LOCATED EACH END AND ONE ON CENTER OF UNIT

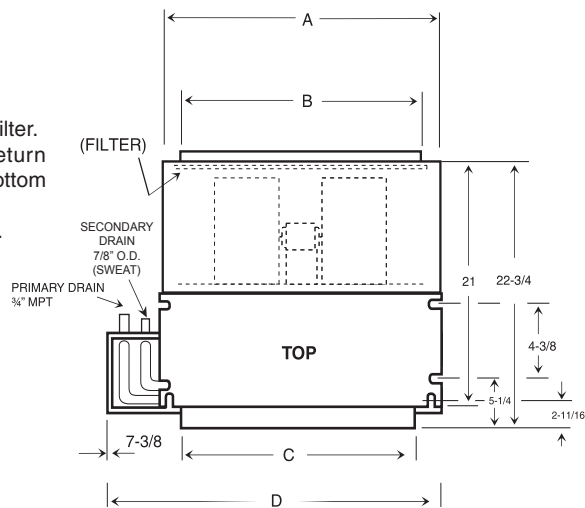

TOP

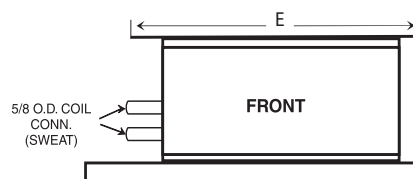

FRONT

NOTE: RIGHT HAND MODEL SHOWN - LEFT HAND MODEL HAS DRAIN AND PIPING CONNECTIONS ON OPPOSITE SIDE OF FAN COIL.

GENERAL DIMENSIONS							
MODEL	A	B	C	D	E	FILTER SIZE (INCL.)	CONNECTIONS PRIMARY O.D.
3*PHBC	24	22	20-1/8	30-1/8	27-1/4	10 X 24	5/8"
4*PHBC(X)	30	28	26-1/8	36-1/8	33-1/4	10 X 30	
5*PHBC	34	32	30-1/8	40-1/8	37-1/4	10 X 34	
6*PHBC(X)	34	32	30-1/8	40-1/8	37-1/4	10 X 34	
8*PHBC(X)	40	38	36-1/8	46-1/8	43-1/4	10 X 40	
10*PHBC(X)	46	44	42-1/8	52-1/8	49-1/4	10 X 46	
12*PHBX(X)	53	51	49-1/8	59-1/8	56-1/4	10 x 53	
13*PHBC	53	51	49-1/8	59-1/8	56-1/4	10 X 53	


(X)- Available with ECM motor

NOTES:

- 1) ALL DIMENSIONS IN INCHES.
- 2) COIL CONNECTION TOLERANCE ± 1/4".
- 3) RIGHT HAND UNIT SHOWN, LEFT HAND MIRROR IMAGE. (HAND IS DETERMINED BY FACING THE BLOWER END)

PHBC HEADER LOCATIONS							
RIGHT HAND	X1	Y1	X2	Y2	X3	Y3	Y4
3 ROW	3	4-1/4	5	4	---	---	---
3/1 Split	3	4-1/4	5	4	8	3-1/2	5-1/2
3/2 Split	3	4-1/4	5	4	8	3-1/2	5-1/2
4 ROW	3	4-1/4	5	4	---	---	---
4/1 Split	3	4-1/4	5	4	8	4	6

PHBC HEADER LOCATIONS							
LEFT HAND	X1	Y1	X2	Y2	X3	Y3	Y4
3 ROW	3	3-3/4	5	4	---	---	---
3/1 Split	3	3-3/4	5	4	8	2-1/2	4-1/2
3/2 Split	3	3-3/4	5	4	8	2-1/2	4-1/2
4 ROW	3	3-3/4	5	4	---	---	---
4/1 Split	3	3-3/4	5	4	8	2	4




NOTES:

1. Telescoping panel allows the cabinet to be installed to within 2 inches of the ceiling line. The adjustable panel frame ensures a flush installation.
2. Louvered access panel (bottom return) is standard. Specify solid panel if ducted rear return air is required.

NOTES:

- 1) ALL DIMENSIONS IN INCHES.
- 2) COIL CONNECTION TOLERANCE $\pm 1/4"$.
- 3) RIGHT HAND UNIT SHOWN, LEFT HAND MIRROR IMAGE. (HAND IS DETERMINED BY FACING THE BLOWER END)

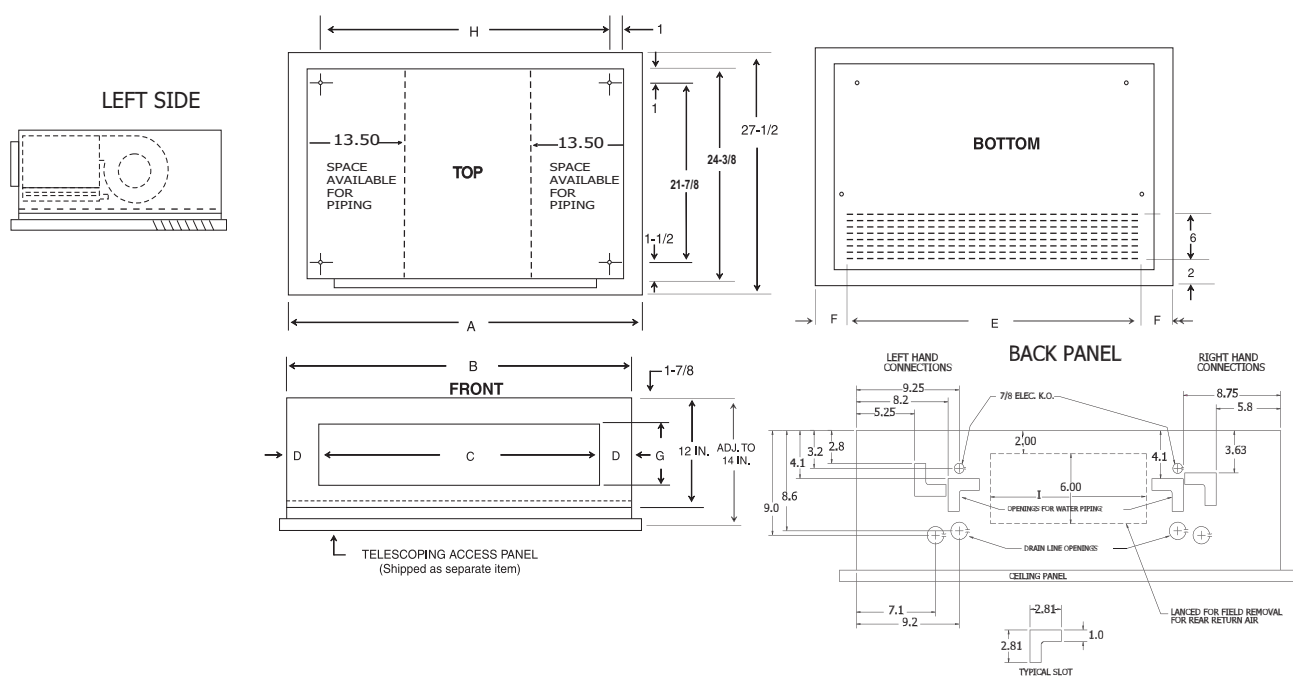


GENERAL DIMENSIONS												
MODEL	A	B	C	D	E	F	G	H	I	TELESCOPING LOUVERED ACCESS PANEL	TELESCOPING SOLID ACCESS PANEL	FILTER SIZE (INCL)
3*RHBC	41	38-1/8	29	4-1/2	36-5/8	2-3/16	5-1/2	36	14	968-1	968-1S	10 X 37
4*RHBC(X)	47	44-1/8	35	4-1/2	42	2-1/2	5-1/2	42	20	968-2	968-2S	10 X 43
5*RHBC	51	48-1/8	39	4-1/2	47-1/4	1-7/8	5-1/2	46	24	968-3	968-3S	10 X 47.5
6*RHBC(X)	51	48-1/8	39	4-1/2	47-1/4	1-7/8	5-1/2	46	24	968-3	968-3S	10 X 47.5
8*RHBC(X)	57	54-1/8	45	4-1/2	52-1/2	2-1/4	5-1/2	52	30	968-4	968-4S	10 X 53
10*RHBC(X)	63	60-1/8	51	4-1/2	57-7/8	2-9/16	5-1/2	58	36	968-5	968-5S	10 X 59
12*RHBC(X)	70	67-1/8	58	4-1/2	63-1/8	3-7/16	5-1/2	65	42	968-6	968-6s	10 x 65
13*RHBC	70	67-1/8	58	4-1/2	63-1/8	3-7/16	5-1/2	65	42	968-6	968-6S	10 X 65


(X)- Available with ECM motor

NOTES:



- 1) ALL DIMENSIONS IN INCHES.
- 2) COIL CONNECTION TOLERANCE $\pm 1/4"$.
- 3) RIGHT HAND UNIT SHOWN, LEFT HAND MIRROR IMAGE.
(HAND IS DETERMINED BY FACING THE BLOWER END)

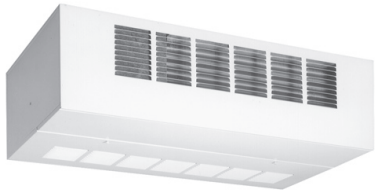

LEFT SIDE



HINGED
FILTER
ACCESS

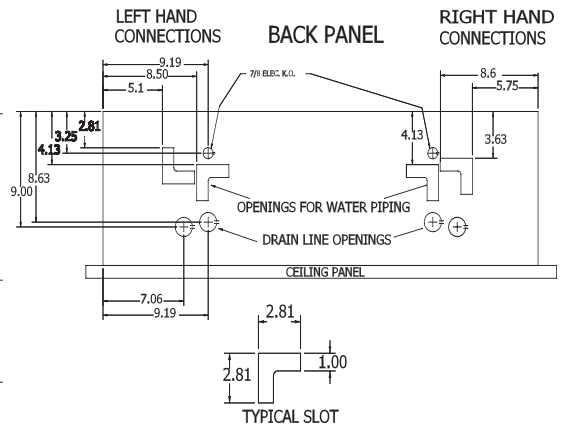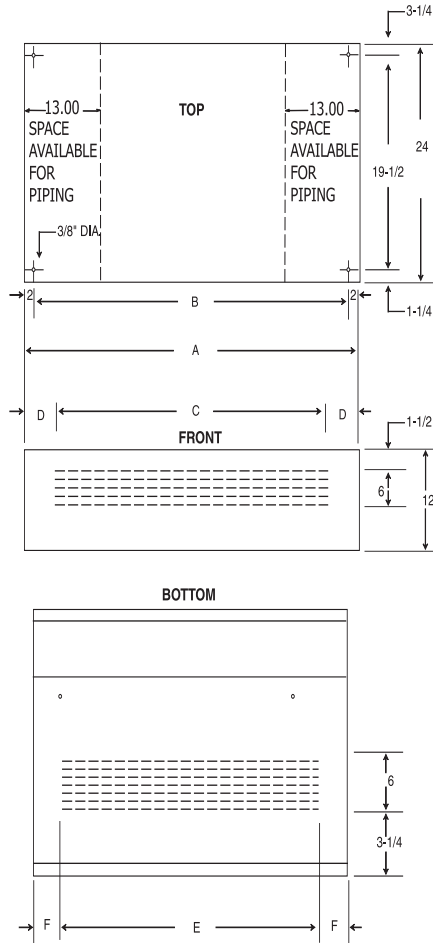

GENERAL DIMENSIONS								
MODEL	A	B	C	D	E	F	FILTER SIZE (INCL)	CONNECTIONS PRIMARY O.D.
3*CHBC	38	34	26	6	31-1/2	3-1/2	10 X 37	5/8"
4*CHBC(X)	44	40	31-1/2	6	37	3-1/2	10 X 43	
5*CHBC	48	44	37	5-1/2	42-1/2	3	10 X 46	
6*CHBC(X)	48	44	37	5-1/2	42-1/2	3	10 X 46	
8*CHBC(X)	54	50	42-1/2	6	48	3	10 X 53	
10*CHBC(X)	60	56	48	6	53	3-1/2	10 X 59	
12*CHBC(X)	67	63	53	7	58-1/2	4	10 X 65	
13*CHBC	67	63	53	7	58-1/2	4	10 X 65	

NOTES:

1. Side panels are removable for easier valve access.

(X)- Available with ECM motor

***HBC-3 (3-Row Coil)** All capacities are based on nominal CFM.

COOLING CAPACITY (1000 BTUH)																		
MODEL	NOMINAL CFM	45°F ENTERING WATER									42°F ENTERING WATER							
		GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			
				TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR	
PSC MOTOR	3*HBC-3	300	3.0	12.6	10.8	7.4	7.2	8.3	6.5	5.5	3.0	12.6	11.8	7.8	7.9	9.0	6.8	6.0
			2.5	9.0	10.4	7.3	8.3	8.0	6.3	6.4	2.5	9.0	11.4	7.6	9.1	8.7	6.6	6.9
			2.0	6.0	9.9	7.1	9.9	7.5	6.2	7.5	2.0	6.0	10.8	7.4	10.8	8.2	6.4	8.2
			1.5	3.6	9.0	6.7	12.1	6.9	5.9	9.2	1.5	3.6	9.9	7.1	13.1	7.5	6.2	10.0
	4*HBC-3	400	3.0	14.7	13.8	9.6	9.2	10.6	8.4	7.0	3.0	14.7	15.1	10.2	10.1	11.5	8.8	7.7
			2.5	10.7	13.2	9.4	10.5	10.0	8.2	8.0	2.5	10.7	14.3	9.8	11.5	11.0	8.6	8.8
			2.0	7.2	12.3	9.1	12.3	9.4	8.0	9.4	2.0	7.2	13.4	9.5	13.4	10.2	8.3	10.2
			1.5	4.4	10.5	8.5	14.4	8.3	7.5	11.0	1.5	4.4	11.8	8.9	15.7	9.0	7.8	12.0
	5*HBC-3	500	6.0	13.8	17.9	12.2	6.0	13.7	10.7	4.6	6.0	13.8	19.6	12.9	6.5	14.9	11.1	5.0
			5.0	9.8	17.3	12.0	6.9	13.2	10.5	5.3	5.0	9.8	18.9	12.6	7.5	14.4	10.9	5.8
			4.0	6.5	16.5	11.7	8.2	12.6	10.2	6.3	4.0	6.5	17.9	12.3	9.0	13.7	10.7	6.9
			3.0	3.8	15.0	11.3	10.0	11.5	9.8	7.7	3.0	3.8	16.4	11.7	10.9	12.5	10.2	8.3
6*HBC-3	600	6.0	13.8	20.6	14.1	6.9	15.7	12.3	5.2	6.0	13.8	22.4	14.8	7.5	17.1	12.9	5.7	
		5.0	9.8	19.8	13.8	7.9	15.1	12.1	6.0	5.0	9.8	21.6	14.5	8.6	16.5	12.6	6.6	
		4.0	6.5	18.7	13.4	9.4	14.3	11.8	7.2	4.0	6.5	20.4	14.1	10.2	15.6	12.3	7.8	
		3.0	3.8	17.0	12.8	11.3	13.0	11.2	8.6	3.0	3.8	18.5	13.4	12.3	14.1	11.7	9.4	
8*HBC-3	800	6.5	13.7	24.7	17.6	7.6	18.9	15.5	5.8	6.5	13.7	27.0	18.5	8.3	20.6	16.1	6.3	
		5.5	10.0	23.7	17.3	8.6	18.1	15.1	6.6	5.5	10.0	25.8	18.1	9.4	19.7	15.8	7.2	
		4.5	6.9	22.3	16.8	9.9	17.0	14.7	7.6	4.5	6.9	24.3	17.5	10.8	18.6	15.3	8.3	
		3.5	4.3	20.1	16.0	11.5	15.4	14.1	8.8	3.5	4.3	21.9	16.6	12.5	16.7	14.6	9.6	
10*HBC-3	1000	8.0	17.9	30.3	21.7	7.6	23.2	19.0	5.8	8.0	17.9	33.0	22.7	8.3	25.2	19.8	6.3	
		7.0	13.7	29.2	21.3	8.4	22.3	18.7	6.4	7.0	13.7	31.9	22.3	9.1	24.3	19.4	7.0	
		6.0	10.1	27.9	20.8	9.3	21.3	18.3	7.1	6.0	10.1	30.4	21.7	10.1	23.2	19.0	7.7	
		5.0	7.0	26.2	20.1	10.5	20.0	17.8	8.0	5.0	7.0	28.5	21.0	11.4	21.8	18.5	8.7	
13*HBC-3	1300	8.0	18.2	36.0	25.4	8.8	26.7	22.3	6.7	8.0	18.2	38.2	26.6	9.5	29.1	23.2	7.3	
		7.0	14.1	33.6	24.9	9.6	25.7	21.9	7.3	7.0	14.1	36.7	26.0	10.5	28.0	22.8	8.0	
		6.0	10.5	31.9	24.3	10.6	24.4	21.4	8.1	6.0	10.5	34.8	25.3	11.6	26.6	22.3	8.9	
		5.0	7.4	29.7	23.5	11.9	22.7	20.8	9.1	5.0	7.4	32.4	24.4	12.9	24.7	21.5	9.9	

***HBC-4 (4-Row Coil)** All capacities are based on nominal CFM.

COOLING CAPACITY (1000 BTUH)																		
MODEL	NOMINAL CFM	45°F ENTERING WATER									42°F ENTERING WATER							
		GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			
				TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR	
PSC MOTOR	3*HBC-4	300	2.5	11.4	11.5	7.8	9.2	8.8	6.8	7.0	2.5	11.4	12.5	8.2	10.0	9.6	7.1	7.7
			2.0	7.6	10.9	7.6	10.9	8.3	6.6	8.3	2.0	7.6	11.9	8.0	11.9	9.1	6.9	9.1
			1.5	4.5	10.0	7.2	13.3	7.6	6.3	10.1	1.5	4.5	10.9	7.6	14.5	8.3	6.6	11.1
			1.0	2.2	8.3	6.6	16.5	6.3	5.8	12.6	1.0	2.2	9.0	6.9	18.0	6.9	6.1	13.7
	4*HBC-4	400	2.5	13.2	14.5	10.1	11.6	11.1	8.8	8.9	2.5	13.2	15.8	10.6	12.7	12.1	9.2	9.7
			2.0	8.9	13.5	9.7	13.5	10.3	8.5	10.3	2.0	8.9	14.7	10.2	14.7	11.3	8.9	11.3
			1.5	5.3	11.9	9.1	15.9	9.1	8.0	12.2	1.5	5.3	13.0	9.6	17.4	9.9	8.4	13.3
			1.2	3.6	10.5	8.6	17.5	8.0	7.6	17.1	1.2	3.6	11.5	9.0	19.1	8.8	7.9	14.6
	5*HBC-4	500	3.5	6.5	17.5	12.4	10.0	13.4	10.8	7.7	3.5	6.5	19.1	13.3	10.9	14.6	11.3	8.3
			3.0	4.9	16.6	12.0	11.1	12.7	10.5	8.5	3.0	4.9	18.1	12.6	12.1	13.8	11.0	9.2
			2.5	3.5	15.4	11.6	12.3	11.8	10.2	9.4	2.5	3.5	16.8	12.1	13.5	12.9	10.6	10.3
			2.0	2.3	13.9	11.0	13.9	10.6	9.7	10.6	2.0	2.3	15.2	11.5	15.2	11.6	10.1	11.6
6*HBC-4	600	5.0	12.6	21.9	15.1	8.8	16.8	13.1	6.7	5.0	12.6	23.9	15.8	9.6	18.3	13.7	7.3	
		4.0	8.3	20.8	14.6	10.4	15.9	12.7	7.9	4.0	5.3	22.6	15.3	11.3	17.3	13.3	8.6	
		3.0	4.9	18.8	13.9	12.5	14.4	12.2	9.6	3.0	4.9	20.5	14.5	13.7	15.7	12.7	10.4	
		2.0	2.3	15.6	12.7	15.6	11.9	11.2	11.9	2.0	2.3	17.0	13.2	17.0	13.0	11.6	13.0	
8*HBC-4	800	6.0	14.7	27.0	19.1	9.0	20.6	16.7	6.9	6.0	14.7	29.4	20.0	9.8	22.5	17.4	7.5	
		5.0	10.7	25.7	18.6	10.3	19.6	16.3	7.8	5.0	10.7	28.0	19.5	11.2	21.4	17.0	8.6	
		4.0	7.2	23.7	17.8	11.9	18.1	15.7	7.2	4.0	7.2	25.9	18.6	12.9	19.7	16.3	9.9	
		3.0	4.4	20.8	16.8	13.9	15.9	14.8	10.6	3.0	4.4	22.7	17.5	15.1	17.3	15.4	11.5	
10*HBC-4	1000	7.0	14.1	32.6	23.3	9.3	24.9	20.4	7.1	7.0	14.1	35.5	24.4	10.2	27.1	21.3	7.8	
		6.0	10.5	31.1	22.8	10.4	23.8	19.9	7.9	6.0	10.5	33.9	23.8	11.3	25.9	20.8	8.6	
		5.0	7.4	29.2	22.0	11.7	22.3	19.4	8.9	5.0	7.4	31.8	23.0	12.7	24.3	20.1	9.7	
		4.0	4.9	26.4	21.0	13.2	20.2	18.6	10.1	4.0	4.9	28.8	21.9	14.4	22.0	19.3	11.0	
13*HBC-4	1300	7.0	16.1	37.5	27.3	10.7	28.7	23.9	8.2	7.0	16.1	40.9	28.6	11.7	31.2	24.9	8.9	
		6.0	12.0	35.7	26.6	11.9	27.2	23.4	9.1	6.0	12.0	38.9	27.8	13.0	29.7	24.3	9.9	
		5.0	8.5	33.1	25.7	13.3	25.3	22.6	10.1	5.0	8.5	36.1	26.8	14.4	27.6	23.5	11.0	
		4.0	5.6	29.7	24.4	14.8	24.6	24.6	12.3	4.0	5.6	32.3	25.4	16.2	24.7	22.4	12.4	

***HBC-31 (3-Row Coil)** All capacities are based on nominal CFM.

COOLING CAPACITY (1000 BTUH)																		
MODEL	NOMINAL CFM	45°F ENTERING WATER									42°F ENTERING WATER							
		GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			
				TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR	
PSC MOTOR	3*HBC-31	300	3.0	12.6	10.4	7.1	6.9	7.9	6.2	5..	3.0	12.6	11.3	7.5	7.5	8.6	6.5	5.8
			2.5	9.0	10.0	7.0	8.0	7.6	6.1	6.1	2.5	9.0	10.9	7.3	8.7	8.3	6.3	6.6
			2.0	6.0	9.4	6.8	9.4	7.2	5.9	7.2	2.0	6.0	10.	7.1	10.3	7.9	6.2	7.9
			1.5	3.6	8.6	6.5	11.5	6.6	5.7	8.8	1.5	3.6	9.4	6.7	12.6	1.2	5.9	9.6
	4*HBC-31	400	3.0	14.7	13.2	9.2	8.8	10.1	8.0	6.7	3.0	14.7	14.4	9.7	9.6	11.0	8.4	7.3
			2.5	10.7	12.6	9.0	10.0	9.6	7.9	7.7	2.5	10.7	13.7	9.4	11.0	10.5	8.2	8.4
			2.0	7.2	11.7	8.7	11.7	8.9	7.6	8.9	2.0	7.2	12.8	9.1	12.8	9.7	7.9	9.7
			1.5	4.4	10.3	8.2	13.8	7.9	7.2	10.5	1.5	4.4	11.3	8.5	15.0	8.6	7.5	11.5
	5*HBC-31	500	6.0	13.8	17.1	11.7	5.7	13.0	10.2	4.3	6.0	13.8	18.6	12.3	6.2	14.2	10.6	4.7
			5.0	9.8	16.5	11.5	6.6	12.6	10.0	5.0	5.0	9.8	18.0	12.0	7.2	13.7	10.4	5.5
			4.0	6.5	15.7	11.2	7.8	12.0	9.8	6.0	4.0	6.5	17.1	11.7	8.5	13.1	10.2	6.5
			3.0	3.8	14.3	10.7	9.5	10.9	9.4	7.3	3.0	3.8	15.6	11.1	10.4	11.9	9.7	.0
6*HBC-31	600	6.0	13.8	19.5	13.4	6.5	14.9	11.7	5.0	6.0	13.8	21.3	14.1	7.1	16.2	12.3	5.4	
		5.0	9.8	18.8	13.2	7.5	14.3	11.5	5.7	5.0	9.8	20.5	13.8	8.2	15.6	12.0	6.2	
		4.0	6.5	17.8	12.8	8.9	13.6	11.2	6.8	4.0	6.5	19.4	13.4	9.7	14.8	11.7	7.4	
		3.0	3.8	16.1	12.2	10.7	12.3	10.7	8.2	3.0	3.8	17.5	12.7	11.7	13.4	11.2	8.9	
8*HBC-31	800	6.5	13.7	23.4	16.8	7.2	17.9	14.7	5.5	6.5	13.7	25.5	17.6	7.9	19.5	15.3	6.0	
		5.5	10.0	22.4	16.4	8.2	17.1	14.4	6.2	5.5	10.0	24.5	17.2	8.9	18.7	15.0	6.8	
		4.5	6.9	21.1	15.9	9.4	16.1	14.0	7.2	4.5	6.9	23.0	16.6	10.2	17.6	14.6	7.8	
		3.5	4.3	29.1	15.2	10.9	14.6	13.4	8.3	3.5	4.3	20.8	15.8	11.9	15.9	13.9	9.1	
10*HBC-31	1000	8.0	17.9	28.7	20.6	7.2	21.9	18.1	5.5	8.0	17.9	31.3	21.6	7.8	23.9	18.8	6.0	
		7.0	13.7	27.7	20.2	7.9	21.1	17.8	6.0	7.0	13.7	30.2	21.1	8.6	23.0	15.8	6.6	
		6.0	10.1	26.4	19.8	8.8	20.2	17.4	6.7	6.0	10.1	28.8	20.6	9.6	22.0	18.1	7.3	
		5.0	7.0	24.8	19.2	9.9	18.9	16.9	7.6	5.0	7.0	27.0	20.0	10.8	20.6	17.6	8.2	
13*HBC-31	1300	8.0	18.2	33.1	24.4	8.3	25.3	21.2	6.3	8.0	18.2	36.1	25.3	9.0	27.6	22.1	6.9	
		7.0	14.1	31.8	23.7	9.1	24.3	20.9	6.9	7.0	14.1	34.7	24.7	9.9	26.5	21.7	7.6	
		6.0	10.5	30.2	23.1	10.1	23.1	20.4	7.7	6.0	10.5	33.0	24.1	11.0	25.2	21.2	8.4	
		5.0	7.4	28.1	22.3	11.2	21.5	19.8	8.6	5.0	7.4	30.6	23.2	12.3	23.4	20.5	9.4	

***HBC-32 (3-Row Coil)** All capacities are based on nominal CFM.

COOLING CAPACITY (1000 BTUH)																		
MODEL	NOMINAL CFM	45°F ENTERING WATER									42°F ENTERING WATER							
		GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			
				TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR	
PSC MOTOR	3*HBC-32	300	3.0	12.6	9.6	6.5	6.4	7.3	5.7	4.9	3.0	12.6	10.5	6.9	7.0	8.0	6.0	5.3
			2.5	9.0	9.3	6.4	7.4	7.1	5.6	5.7	2.5	9.0	10.1	6.7	8.1	7.7	5.8	6.2
			2.0	6.0	8.8	6.2	8.8	6.7	5.4	6.7	2.0	6.0	9.6	6.5	9.6	7.3	5.7	7.3
			1.5	3.6	8.0	5.9	10.7	6.1	5.2	8.2	1.5	3.6	8.7	6.2	11.7	6.7	5.4	8.9
	4*HBC-32	400	3.0	14.7	12.2	8.5	8.2	9.4	7.4	6.2	3.0	14.7	13.4	8.9	8.9	10.2	7.7	6.8
			2.5	10.7	11.7	8.2	9.3	8.9	7.2	7.1	2.5	10.7	12.7	8.6	10.2	9.7	7.5	7.8
			2.0	7.2	10.9	8.0	10.9	8.3	7.0	8.3	2.0	7.2	11.9	8.3	11.9	9.1	7.3	9.1
			1.5	4.4	9.6	7.5	12.8	7.3	6.6	9.8	1.5	4.4	10.5	7.8	14.0	8.0	6.9	10.7
	5*HBC-32	500	6.0	13.8	15.9	10.7	5.3	12.1	9.4	4.0	6.0	13.8	17.3	11.3	5.8	13.2	9.8	4.4
			5.0	9.8	15.3	10.5	6.1	11.7	9.2	4.7	5.0	9.8	16.7	11.0	6.7	12.8	9.6	5.1
			4.0	6.5	14.6	10.2	7.3	11.1	9.0	5.6	4.0	6.5	15.9	10.7	7.9	12.1	9.4	6.1
			3.0	3.8	13.3	9.8	8.9	10.2	8.6	6.8	3.0	3.8	14.5	10.2	9.7	11.1	8.9	7.4
6*HBC-32	600	6.0	13.8	18.2	12.3	6.1	13.9	10.7	5.1	6.0	13.8	19.8	12.9	6.6	15.2	11.2	5.1	
		5.0	9.8	17.5	12.0	7.0	13.4	10.5	5.8	5.0	9.8	19.1	12.6	7.6	14.6	11.0	5.8	
		4.0	6.5	16.6	11.7	8.3	12.6	10.3	6.7	4.0	6.5	18.1	12.2	9.0	13.8	10.7	6.9	
		3.0	3.8	15.0	11.1	10.0	11.5	9.8	7.8	3.0	3.8	16.4	11.6	10.9	12.5	10.2	8.3	
8*HBC-32	800	6.5	13.7	21.9	15.3	7.2	16.7	13.4	5.1	6.5	13.7	23.8	16.0	7.3	18.2	14.0	5.6	
		5.5	10.0	20.9	14.9	7.6	16.0	13.1	5.8	5.5	10.0	22.8	15.6	8.3	17.4	13.7	6.3	
		4.5	6.9	19.7	14.5	8.8	15.1	12.8	6.7	4.5	6.9	21.5	15.1	9.6	16.4	13.3	7.3	
		3.5	4.3	17.8	13.8	10.2	13.6	12.2	7.8	3.5	4.3	19.4	14.4	11.1	14.8	12.7	8.5	
10*HBC-32	1000	8.0	17.9	26.8	18.7	6.7	20.5	16.4	5.1	8.0	17.9	29.2	19.6	7.3	22.3	17.1	5.6	
		7.0	13.7	25.8	18.3	7.4	19.7	16.1	5.8	7.0	13.7	28.2	19.2	8.0	21.5	16.8	6.1	
		6.0	10.1	24.7	17.9	8.2	18.8	15.8	6.7	6.0	10.1	26.9	18.7	9.0	20.5	16.4	6.8	
		5.0	7.0	23.1	17.4	9.2	17.6	15.3	7.1	5.0	7.0	25.2	18.1	10.1	19.2	15.9	7.7	
13*HBC-32	1300	8.0	18.2	30.9	21.9	7.7	23.6	19.2	5.9	8.0	18.2	33.7	22.9	8.4	25.8	20.	6.4	
		7.0	14.1	29.7	21.4	8.5	22.7	18.9	6.5	7.0	14.1	32.4	22.4	9.3	24.7	19.7	7.1	
		6.0	10.5	28.2	20.9	9.4	21.6	18.5	7.2	6.0	10.5	30.8	21.8	10.3	23.5	19.2	7.8	
		5.0	7.4	26.2	20.2	10.5	20.0	17.9	8.0	5.0	7.4	28.6	21.0	11.4	21.8	18.6	8.7	

***HBC-41 (4-Row Coil)** All capacities are based on nominal CFM.

COOLING CAPACITY (1000 BTUH)																	
MODEL	NOMINAL CFM	45°F ENTERING WATER									42°F ENTERING WATER						
		GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)			GPM	P.D. (FT. WTR.)	80°F D.B. (67°F W.B.)			75°F D.B. (63°F W.B.)		
				TH	SH	TR	TH	SH	TR			TH	SH	TR	TH	SH	TR
3*HBC-41	300	3.0	15.9	11.2	7.5	7.5	8.6	6.5	5.7	3.0	15.9	12.3	7.9	8.2	9.4	6.8	6.2
		2.5	11.4	10.8	7.4	8.7	8.3	6.4	6.6	2.5	11.4	11.8	7.7	9.4	9.0	6.7	7.2
		2.0	7.6	10.2	7.1	10.2	7.8	6.2	7.8	2.0	7.6	11.2	7.5	11.2	8.5	6.5	8.5
		1.5	4.5	9.4	6.8	12.5	7.2	6.0	9.5	1.5	4.5	10.2	7.1	13.6	7.8	6.2	10.4
4*HBC-41	400	3.0	18.2	14.3	9.8	9.6	10.9	8.5	7.3	3.0	18.2	15.6	10.3	10.4	11.9	8.9	8.0
		2.5	13.2	13.6	9.5	10.9	10.4	8.3	8.3	2.5	13.2	14.9	10.0	11.9	11.4	8.7	9.1
		2.0	8.9	12.7	9.2	12.7	9.7	8.0	9.7	2.0	8.9	13.9	9.6	13.9	10.6	8.4	10.6
		1.5	5.3	11.2	8.6	15.0	8.6	7.6	11.4	1.5	5.3	12.2	9.0	16.3	9.4	7.9	12.5
5*HBC-41	500	6.0	17.6	18.9	12.6	6.3	14.5	10.9	4.8	6.0	17.6	20.6	13.3	6.9	15.8	11.5	5.3
		5.0	12.6	18.3	12.3	7.3	14.0	10.7	5.6	5.0	12.6	19.9	13.0	8.0	15.2	11.2	6.1
		4.0	8.3	17.4	12.0	8.7	13.3	10.5	6.6	4.0	8.3	19.0	12.6	9.5	14.5	10.9	7.2
		3.0	4.9	15.9	11.4	10.6	12.1	10.0	8.1	3.0	4.9	17.3	12.0	11.5	13.2	10.4	8.8
6*HBC-41	600	6.0	17.6	21.5	14.4	7.2	16.4	12.6	5.5	6.0	17.6	23.5	15.2	7.8	17.9	13.1	6.0
		5.0	12.6	20.7	14.1	8.3	15.8	12.3	6.3	5.0	12.6	22.6	14.8	9.0	17.2	12.9	6.9
		4.0	8.3	19.6	13.7	9.8	15.0	12.0	7.5	4.0	8.3	21.3	14.4	10.7	16.3	12.5	8.2
		3.0	4.9	17.7	13.0	11.8	13.6	11.4	9.0	3.0	4.9	19.3	13.6	12.9	14.8	11.9	9.8
8*HBC-41	800	6.5	16.9	26.0	18.1	8.0	19.6	15.8	6.1	6.5	16.9	28.3	19.0	8.7	21.6	16.5	6.7
		5.5	12.6	24.9	17.7	9.1	19.0	15.5	6.9	5.5	12.6	27.1	18.5	9.9	20.7	16.1	7.5
		4.5	8.9	23.4	17.1	10.4	17.9	15.0	8.0	4.5	8.9	25.6	17.9	11.4	19.5	16.7	8.7
		3.5	5.7	21.1	16.3	12.1	16.1	14.4	9.2	3.5	5.7	23.0	17.0	13.2	17.6	14.9	10.1
10HBC-41	1000	8.0	18.2	31.9	22.3	8.0	24.4	19.5	6.1	8.0	18.2	34.8	23.3	8.7	26.6	20.3	6.6
		7.0	14.1	30.8	21.8	8.8	23.5	19.1	6.7	7.0	14.1	33.6	22.9	9.6	25.7	19.9	7.3
		6.0	10.5	29.4	21.3	9.8	22.5	18.7	7.5	6.0	10.5	32.1	22.3	10.7	24.5	19.5	8.2
		5.0	7.4	27.6	20.6	11.0	21.1	18.2	8.4	5.0	7.4	20.0	21.6	12.0	22.9	18.9	9.2
13*HBC-41	1300	8.0	20.8	37.0	26.1	9.2	28.2	22.9	7.1	8.0	20.8	40.3	27.4	10.1	30.8	23.9	7.7
		7.0	16.1	35.5	25.6	10.1	27.1	22.4	7.7	7.0	16.1	38.7	26.8	11.1	29.6	23.4	8.4
		6.0	12.0	33.7	24.9	11.2	25.8	21.9	8.6	6.0	12.0	36.8	26.1	12.3	28.1	22.8	9.4
		5.0	8.5	31.3	24.1	12.5	23.9	21.2	9.6	5.0	8.5	34.2	25.1	13.7	26.1	22.0	10.4

*HBC-3 (3-Row Coil)							
HEATING CAPACITY (1000 BTUH)							
MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
				180°F	160°F	140°F	120°F
3*HBC-3	300	3.0	12.6	26.9	22.0	17.1	12.2
		2.0	3.0	26.0	21.2	16.5	11.8
		1.0	1.7	23.4	19.1	14.9	10.6
4*HBC-3	400	3.5	19.3	35.8	29.3	22.8	16.3
		2.5	10.7	34.6	28.3	22.0	15.7
		1.5	4.4	32.1	26.3	20.4	14.6
5*HBC-3	500	5.0	9.8	43.7	35.7	27.8	19.8
		3.5	5.1	42.2	34.5	26.8	19.2
		2.0	1.8	38.6	31.6	24.6	17.5
6*HBC-3	600	5.0	9.8	49.7	40.6	31.6	22.6
		3.5	5.1	47.8	39.1	30.4	21.7
		2.0	1.8	43.5	35.6	27.7	19.8
8*HBC-3	800	7.0	15.7	65.0	53.2	41.4	29.6
		5.0	8.4	62.7	51.3	39.9	28.5
		3.0	3.2	57.7	47.2	39.7	26.2
10*HBC-3	1000	8.0	17.9	79.2	64.8	50.4	36.0
		6.0	10.1	76.6	62.7	48.8	34.8
		4.0	4.5	71.9	58.8	45.7	32.7
13*HBC-3	1300	8.0	18.2	93.3	76.4	59.4	42.4
		6.0	10.5	90.0	73.6	57.2	40.9
		4.0	4.9	83.8	68.6	53.3	38.1

*HBC-31 (1-Row Coil)							
HEATING CAPACITY (1000 BTUH)							
MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
				180°F	160°F	140°F	120°F
3*HBC-31	300	2.0	11.3	15.2	12.4	9.6	6.9
		1.5	6.7	14.7	12.0	9.4	6.7
		1.0	3.2	13.9	11.4	8.8	6.3
4*HBC-31	400	2.0	14.4	19.6	16.1	12.5	8.9
		1.5	8.9	18.9	15.5	12.0	8.6
		1.0	4.5	17.5	14.4	11.2	8.0
5*HBC-31	500	2.0	15.0	23.3	19.1	14.8	10.6
		1.5	9.0	22.3	18.2	14.2	10.1
		1.0	4.4	20.4	16.7	13.0	9.3
6*HBC-31	600	2.0	15.0	25.7	21.0	16.4	11.7
		1.5	9.0	24.5	20.0	15.6	11.1
		1.0	4.4	22.4	18.3	14.2	10.2
8*HBC-31	800	2.0	18.8	31.6	25.9	20.1	14.4
		1.5	11.3	29.8	24.4	19.0	13.6
		1.0	5.5	26.8	21.9	17.0	12.2
10*HBC-31	1000	2.0	19.9	37.0	30.3	23.5	16.8
		1.5	12.3	34.6	28.3	22.0	15.7
		1.0	6.2	30.8	25.2	19.6	14.0
13A*HBC-31	1300	2.0	23.4	42.3	34.6	26.9	19.2
		1.5	14.0	39.4	32.2	25.1	17.9
		1.0	6.8	35.2	28.8	22.4	16.0

*HBC-4 (4-Row Coil)							
HEATING CAPACITY (1000 BTUH)							
MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
				180°F	160°F	140°F	120°F
3*HBC-4	300	3.0	15.9	28.6	23.4	18.2	13.0
		2.0	7.6	27.6	22.6	17.6	12.6
		1.0	2.2	14.9	20.3	15.8	11.3
4*HBC-4	400	3.0	18.2	37.6	30.7	23.9	17.1
		2.0	8.9	35.8	29.3	22.8	16.3
		1.0	2.6	31.3	25.6	19.9	14.2
5*HBC-4	500	4.0	8.3	45.6	37.3	29.0	20.7
		3.0	4.9	44.0	36.0	28.0	20.0
		2.0	2.3	41.2	33.7	26.2	18.7
6*HBC-4	600	5.0	12.6	53.2	43.5	33.9	24.2
		4.0	8.3	52.0	42.6	33.1	23.6
		3.0	4.9	50.1	41.0	31.9	22.8
8*HBC-4	800	6.0	14.7	68.8	56.3	43.8	31.3
		4.5	8.9	66.4	54.3	42.3	30.2
		3.0	4.4	62.0	50.7	39.4	28.2
10*HBC-4	1000	7.5	16.1	84.7	69.3	53.9	38.5
		6.0	10.5	82.5	67.5	52.5	37.5
		4.5	4.5	79.0	64.6	50.3	35.9
13*HBC-4	1300	8.0	20.8	100.5	92.2	63.9	45.7
		6.5	14.0	97.9	80.1	62.3	44.5
		5.0	8.5	94.1	77.0	69.9	42.8

*HBC-32 (2-Row Coil)							
HEATING CAPACITY (1000 BTUH)							
MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
				180°F	160°F	140°F	120°F
3*HBC-32	300	3.0	10.5	18.3	15.0	11.7	8.3
		2.0	5.1	17.7	14.5	11.2	8.0
		1.0	1.5	15.9	13.0	10.1	7.2
4*HBC-32	400	3.0	11.2	24.0	19.6	15.2	10.9
		2.0	5.4	22.8	18.7	14.5	10.4
		1.0	1.6	20.0	16.4	12.7	9.1
5*HBC-32	500	3.0	13.4	28.8	23.5	18.3	13.1
		2.0	6.4	27.2	22.3	17.3	12.4
		1.0	1.9	23.4	19.1	14.9	10.6
6*HBC-32	600	3.0	13.4	32.1	26.2	20.4	14.6
		2.0	6.4	30.3	24.8	19.3	13.8
		1.0	1.9	25.8	21.1	16.4	11.7
8*HBC-32	800	4.0	8.4	40.5	33.1	25.8	18.4
		3.0	4.8	38.6	31.6	24.6	17.5
		2.0	2.2	35.4	28.9	22.5	16.1
10*HBC-32	1000	4.0	8.1	48.2	39.5	30.7	21.9
		3.0	4.7	45.7	37.4	29.1	20.8
		2.0	2.2	41.3	33.8	26.3	18.8
13*HBC-32	1300	4.0	7.8	56.1	45.9	35.7	25.5
		3.0	4.3	52.8	43.2	33.6	24.0
		2.0	1.9	47.3	38.7	30.1	21.5

*HBC-41 (1-Row Coil)							
HEATING CAPACITY (1000 BTUH)							
MODEL	NOMINAL CFM	GPM	P.D. (F. WTR)	ENTERING WATER TEMP.			
				180°F	160°F	140°F	120°F
3*HBC-41	300	2.0	11.3	14.1	11.6	9.0	6.4
		1.5	6.7	13.7	11.2	8.7	6.2
		1.0	3.2	13.0	10.6	8.2	5.9
4*HBC-341	400	2.0	14.4	18.2	14.9	11.6	8.3
		1.5	8.9	17.6	14.4	11.2	8.0
		1.0	4.5	16.3	13.36	10.4	7.4
5*HBC-41	500	2.0	15.0	21.4	17.5	13.6	9.7
		1.5	9.0	20.5	16.8	13.0	9.3
		1.0	4.4	18.8	15.3	11.9	8.5
6*HBC-41	600	2.0	15.0	23.2	19.0	14.8	10.5
		1.5	9.0	22.1	18.1	14.1	10.0
		1.0	4.4	20.2	16.5	12.8	9.2
8*HBC-41	800	2.0	18.8	28.4	23.2	18.1	12.9
		1.5	11.3	26.8	21.9	17.1	12.2
		1.0	5.5	24.1	19.7	15.3	10.9
10*HBC-41	1000	2.0	19.9	33.3	27.2	21.2	15.1
		1.5	12.3	31.1	25.5	19.8	14.1
		1.0	6.2	27.7	22.7	17.6	12.6
13*HBC-41	1300	2.0	23.4	38.1	31.2	24.2	17.3
		1.5	14.0	35.4	29.0	22.5	16.1
		1.0	6.8	31.6	25.9	20.1	14.4

NOTES:

1. Ratings at 70 degree ent. air temp.
2. Contact factory for capacities at other conditions

- * - P - with insulated return plenum
- R - recessed with telescoping panel
- C - cabinet exposed

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

COOLING CORRECTIONS

COOLING CAPACITY CORRECTION FACTORS														
MODEL	3HBC		4HBC		5HBC		6HBC		8HBC		10HBC		13HBC	
CFM	TH	SH	TH	SH	TH	SH	TH	SH	TH	SH	TH	SH	TH	SH
150	.70	.64												
175	.75	.70												
200	.80	.76												
225	.85	.82												
250	0.9	.88	.70	.64										
300	1.00	1.00	.76	.71	.70	.64								
325	1.04	1.06	.79	.75	.72	.67								
350	1.10	1.12	.82	.78	.75	.70	.69	.63						
400			.88	.86	.80	.76	.73	.68						
450			.94	.93	.85	.82	.77	.73	.71	.66				
500			1.00	1.00	.90	.88	.81	.77	.74	.69				
550			1.06	1.07	.95	.94	.85	.82	.78	.73	.71	.65		
600			1.12	1.14	1.00	1.00	.89	.87	.81	.78	.74	.68		
700					1.10	1.12	.98	.98	.88	.85	.79	.75	.70	.64
800							1.05	1.06	.95	.94	.85	.82	.74	.69
900							1.14	1.16	1.02	1.02	.90	.88	.78	.74
1000									1.09	1.11	.96	.95	.83	.79
1100									1.15	1.18	1.02	1.02	.87	.85
1200											1.07	1.09	.92	.90
1300											1.12	1.14	1.06	1.05
1400													1.00	1.00
1500													1.04	1.05

TH - Total Heat SH - Sensible Heat

ARI APPROVED STANDARD RATINGS							
	MODEL	COIL	CFM	PRESS DROP (FT.WTR.)	COOLING (1000 BTUH)		POWER INPUT (WATTS)
					TH	SH	
PSC MOTOR	3*HBC-3	3-ROW	310	8.0	9.8	6.7	120
	4*HBC-3		510	12.5	13.4	9.5	120
	5*HBC-3		600	8.0	16.3	11.0	130
	6*HBC-3		730	10.5	20.0	14.0	240
	8*HBC-3		870	8.0	22.5	17.0	340
	10*HBC-3		1070	8.0	27.8	20.8	450
	13*HBC-3		1400	14.0	35.5	26.5	530
	3*HBC-4	4-ROW	310	12.0	10.8	7.0	120
	4*HBC-4		510	23.2	16.0	10.6	120
	5*HBC-4		600	12.0	18.0	11.8	130
	6*HBC-4		730	18.0	23.0	15.6	240
	8*HBC-4		870	14.0	26.9	18.9	340
	10*HBC-4		1070	14.0	32.2	23	450
13*HBC-4	1400		24.0	41.5	29.5	530	

Rated in accordance with ARI Standard 440.



Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE HBC 120 VOLT PSC

HBC (120 Volt)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 120 Volt)													
MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3*HBC-3	1/20	1050	.09	HI	335	300	270	235	---	---	---	---	---
				MED	275	245	220	---	---	---	---	---	
				LOW (4)	230	210	---	---	---	---	---	---	
4*HBC-3	1/12	1050	1.1	HI	525	480	425	350	---	---	---	---	---
				MED	410	375	330	260	---	---	---	---	
				LOW	350	325	280	---	---	---	---	---	
5*HBC-3	1/12	1050	1.3	HI	610	560	510	450	375	---	---	---	---
				MED	500	465	425	370	---	---	---	---	
				LOW	355	345	325	290	---	---	---	---	
6*HBC-3	1/8	1550	1.9	HI	755	730	705	680	650	620	---	---	---
				MED	675	650	620	595	565	540	---	---	
				LOW	570	550	530	510	485	450	---	---	
8*HBC-3	1/5	1550	3.0	HI	950	920	895	870	840	810	775	740	635
				MED	775	755	730	710	690	665	635	605	530
				LOW	690	605	585	560	540	515	485	460	405
10*HBC-3	1/4	1550	3.6	HI	1175	1145	1115	1085	1055	1025	995	960	890
				MED	950	930	915	900	885	870	850	820	745
				LOW	805	795	785	775	755	735	710	680	620
13*HBC-3	1/5 (two)	1550	2.3 Ea.	HI	1545	1500	1455	1450	1365	1320	1280	1235	1120
				MED	1355	1320	1280	1240	1205	1165	1125	1085	975
				LOW	1190	1160	1130	1150	1075	1035	990	940	830
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 120 Volt)													
3*HBC-4 -31	1/20	1050	0.9	HI	315	280	250	---	---	---	---	---	---
				MED	260	230	200	---	---	---	---	---	
				LOW (4)	220	195	---	---	---	---	---	---	
4*HBC-4 -31	1/12	1050	1.1	HI	490	450	395	320	---	---	---	---	---
				MED	405	370	320	250	---	---	---	---	
				LOW	350	320	280	---	---	---	---	---	
5*HBC-4 -31	1/12	1050	1.3	HI	605	550	500	445	375	---	---	---	---
				MED	500	455	415	365	---	---	---	---	
				LOW	360	340	315	275	---	---	---	---	
6*HBC-4 -31	1/8	1550	1.9	HI	745	710	675	645	610	580	---	---	---
				MED	745	615	590	560	535	500	---	---	
				LOW	650	535	510	485	455	420	---	---	
8*HBC-4 -31	1/5	1550	3.0	HI	915	885	855	825	800	765	735	705	625
				MED	755	730	705	675	650	620	590	555	480
				LOW	620	595	575	550	530	500	475	440	370
10*HBC-4 -31	1/4	1550	3.6	HI	1140	1110	1080	1045	1010	975	935	890	825
				MED	940	915	895	875	850	825	795	765	680
				LOW	790	775	755	735	715	690	660	630	555
13*HBC-4 -31	1/5 (two)	1550	2.3 Ea.	HI	1495	1450	1405	1360	1310	1165	1215	1165	1055
				MED	1310	1270	1235	1200	1160	1115	1070	1020	930
				LOW	1165	1130	1095	1060	1020	985	940	895	780
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 120 Volt)													
3*HBC-41 -32	1/20	1050	0.9	HI	305	270	240	---	---	---	---	---	---
				MED	250	225	200	---	---	---	---	---	
				LOW (4)	210	190	---	---	---	---	---	---	
4*HBC-41 -32	1/12	1050	1.1	HI	470	420	365	290	---	---	---	---	---
				MED	395	355	300	235	---	---	---	---	
				LOW	345	305	270	---	---	---	---	---	
5*HBC-41 -32	1/12	1050	1.3	HI	575	520	470	415	---	---	---	---	---
				MED	480	440	400	350	---	---	---	---	
				LOW	345	325	300	---	---	---	---	---	
6*HBC-41 -32	1/8	1550	1.9	HI	660	625	595	565	530	495	---	---	---
				MED	555	520	485	445	425	395	---	---	
				LOW	475	440	410	380	350	320	---	---	
8*HBC-41 -32	1/5	1550	3.0	HI	905	875	845	815	785	750	715	680	605
				MED	755	725	705	680	650	620	590	555	495
				LOW	635	615	595	570	550	525	495	465	405
10*HBC-41 -32	1/4	1550	3.6	HI	1115	1075	1040	1005	970	935	900	860	765
				MED	925	905	880	860	835	805	765	725	630
				LOW	790	765	745	725	700	675	640	605	530
13*HBC-41 -32	1/5 (two)	1550	2.3 Ea.	HI	1470	1420	1370	1320	1270	1220	1165	1105	965
				MED	1355	1315	1265	1220	1170	1115	1060	1005	870
				LOW	1195	1160	1120	1080	1035	985	935	875	745

Notes:

1. Motors are 120v/60Hz, high efficiency PSC type
2. Maximum HACR breaker is 15 amp
3. Coil fins-per-inch varies to allow consistent air flow
4. (4) The size 3 motor (models 3(P/R/C)(HBC) may not start on low speed due to low starting torque. These units must be wired to start on either Medium or High speed.

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE PHBC 120 VOLT PSC

PHBC (120 Volt)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 120 Volt)													
MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3PHBC-3	1/20	1050	.09	HI	320	285	250	---	---	---	---	---	---
				MED	260	230	205	---	---	---	---	---	
				LOW (4)	220	200	---	---	---	---	---	---	
4PHBC-3	1/12	1050	1.1	HI	405	355	295	---	---	---	---	---	
				MED	360	315	255	---	---	---	---	---	
				LOW	340	305	245	---	---	---	---	---	
5PHBC-3	1/12	1050	1.3	HI	545	500	445	385	---	---	---	---	
				MED	475	440	395	335	---	---	---	---	
				LOW	345	320	290	250	---	---	---	---	
6PHBC-3	1/8	1550	1.9	HI	705	675	650	620	590	555	---	---	
				MED	645	620	595	565	535	505	---	---	
				LOW	560	540	515	490	460	430	---	---	
8PHBC-3	1/5	1550	3.0	HI	890	855	820	780	745	710	670	630	
				MED	760	725	695	665	630	595	565	530	
				LOW	620	595	565	540	515	485	455	420	
10PHBC-3	1/4	1550	3.6	HI	1165	1130	1095	1060	1020	975	930	880	
				MED	1065	1025	990	955	915	875	835	795	
				LOW	890	865	840	815	790	765	735	700	
13PHBC-3	1/5 (two)	1550	2.3 Ea.	HI	1345	1295	1250	1205	1155	1100	1045	980	
				MED	1255	1210	1170	1120	1075	1025	970	915	
				LOW	1165	1125	1080	1035	985	930	875	820	
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 120 Volt)													
3PHBC-4 -31	1/20	1050	0.9	HI	290	260	230	---	---	---	---	---	
				MED	245	220	---	---	---	---	---	---	
				LOW (4)	215	185	---	---	---	---	---	---	
4PHBC-4 -31	1/12	1050	1.1	HI	380	335	285	---	---	---	---	---	
				MED	345	295	---	---	---	---	---	---	
				LOW	315	275	---	---	---	---	---	---	
5PHBC-4 -31	1/12	1050	1.3	HI	540	490	435	370	---	---	---	---	
				MED	475	435	365	290	---	---	---	---	
				LOW	365	340	305	---	---	---	---	---	
6PHBC-4 -31	1/8	1550	1.9	HI	695	660	630	595	560	520	---	---	
				MED	620	590	560	530	500	465	---	---	
				LOW	560	525	490	460	425	390	---	---	
8PHBC-4 -31	1/5	1550	3.0	HI	870	830	795	755	720	685	645	605	
				MED	745	715	680	645	615	580	545	510	
				LOW	605	580	555	535	505	480	445	415	
10PHBC-4 -31	1/4	1550	3.6	HI	1120	1075	1030	990	945	905	865	820	
				MED	1035	1000	960	920	880	840	795	755	
				LOW	905	875	845	815	780	750	715	675	
13PHBC-4 -31	1/5 (two)	1550	2.3 Ea.	HI	1300	1255	1210	1165	1115	1060	1005	940	
				MED	1225	1180	1130	1080	1035	950	935	880	
				LOW	1125	1080	1035	990	945	895	845	795	
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 120 Volt)													
3PHBC-41 -32	1/20	1050	0.9	HI	285	250	220	---	---	---	---	---	
				MED	235	210	---	---	---	---	---	---	
				LOW (4)	205	180	---	---	---	---	---	---	
4PHBC-41 -32	1/12	1050	1.1	HI	370	320	265	---	---	---	---	---	
				MED	325	280	---	---	---	---	---	---	
				LOW	295	250	---	---	---	---	---	---	
5PHBC-41 -32	1/12	1050	1.3	HI	505	450	395	335	---	---	---	---	
				MED	445	400	350	295	---	---	---	---	
				LOW	325	300	270	---	---	---	---	---	
6PHBC-41 -32	1/8	1550	1.9	HI	665	625	590	555	515	480	---	---	
				MED	605	570	535	505	470	430	---	---	
				LOW	535	505	470	440	405	370	---	---	
8PHBC-41 -32	1/5	1550	3.0	HI	845	810	780	750	715	680	640	605	
				MED	725	700	670	640	610	580	550	520	
				LOW	605	580	560	535	505	480	455	425	
10PHBC-41 -32	1/4	1550	3.6	HI	1015	975	940	900	865	825	785	750	
				MED	890	855	825	795	765	735	700	665	
				LOW	770	740	710	685	660	630	600	570	
13PHBC-41 -32	1/5 (two)	1550	2.3 Ea.	HI	1295	1245	1195	1145	1090	1035	975	915	
				MED	1215	1165	1120	1065	1015	960	905	845	
				LOW	1120	1075	1025	975	930	885	835	785	

Notes:

1. Motors are 120v / 60Hz, high efficiency PSC type
2. Maximum HACR breaker is 15 amp
3. Coil fins-per-inch varies to allow consistent air flow
4. (4) The size 3 motor (models 3(P/R/C)HBC) may not start on low speed due to low starting torque. These units must be wired to start on either Medium or High speed.

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE RHBC 120 VOLT PSC

RHBC (120 Volt)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 120 Volt)													
MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3RHBC-3	1/20	1050	.09	HI	320	285	250	---	---	---	---	---	---
				MED	260	230	205	---	---	---	---	---	
				LOW (4)	220	200	---	---	---	---	---	---	
4RHBC-3	1/12	1050	1.1	HI	405	355	295	---	---	---	---	---	
				MED	360	315	255	---	---	---	---	---	
				LOW	340	305	245	---	---	---	---	---	
5RHBC-3	1/12	1050	1.3	HI	545	500	445	385	---	---	---	---	
				MED	475	440	395	335	---	---	---	---	
				LOW	345	320	290	250	---	---	---	---	
6RHBC-3	1/8	1550	1.9	HI	705	675	650	620	590	555	---	---	
				MED	645	620	595	565	535	505	---	---	
				LOW	560	540	515	490	460	430	---	---	
8RHBC-3	1/5	1550	3.0	HI	890	855	820	780	745	710	670	630	
				MED	745	725	695	665	630	600	565	530	460
				LOW	620	595	565	540	515	485	455	420	360
10RHBC-3	1/4	1550	3.6	HI	1165	1130	1095	1060	1020	975	930	880	785
				MED	1065	1025	990	955	915	875	835	795	710
				LOW	890	865	840	815	790	765	735	700	625
13RHBC-3	1/5 (two)	1550	2.3 Ea.	HI	1345	1295	1250	1200	1155	1100	1045	980	855
				MED	1255	1210	1170	1120	1075	1025	970	915	795
				LOW	1165	1125	1080	1035	985	930	875	820	710
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 120 Volt)													
3RHBC-4 -31	1/20	1050	0.9	HI	290	260	230	---	---	---	---	---	---
				MED	245	220	---	---	---	---	---	---	
				LOW (4)	215	185	---	---	---	---	---	---	
4RHBC-4 -31	1/12	1050	1.1	HI	380	335	285	---	---	---	---	---	
				MED	345	295	---	---	---	---	---	---	
				LOW	315	275	---	---	---	---	---	---	
5RHBC-4 -31	1/12	1050	1.3	HI	540	490	435	370	---	---	---	---	
				MED	475	435	365	290	---	---	---	---	
				LOW	365	340	305	---	---	---	---	---	
6RHBC-4 -31	1/8	1550	1.9	HI	695	660	630	595	560	520	---	---	
				MED	620	590	560	530	500	465	---	---	
				LOW	560	525	490	460	425	390	---	---	
8RHBC-4 -31	1/5	1550	3.0	HI	870	830	795	755	720	685	645	605	
				MED	745	715	680	645	615	580	545	510	440
				LOW	605	580	555	535	505	480	445	415	355
10RHBC-4 -31	1/4	1550	3.6	HI	1120	1075	1030	990	945	905	865	820	725
				MED	1035	1000	960	920	880	840	795	755	675
				LOW	905	875	845	815	780	750	715	675	600
13RHBC-4 -31	1/5 (two)	1550	2.3 Ea.	HI	1300	1255	1210	1165	1115	1060	1005	940	820
				MED	1225	1180	1130	1080	1035	990	935	880	755
				LOW	1125	1080	1035	990	945	895	845	795	690
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 120 Volt)													
3RHBC-41 -32	1/20	1050	0.9	HI	285	250	220	---	---	---	---	---	---
				MED	235	210	---	---	---	---	---	---	
				LOW (4)	205	180	---	---	---	---	---	---	
4RHBC-41 -32	1/12	1050	1.1	HI	370	320	265	---	---	---	---	---	
				MED	325	280	---	---	---	---	---	---	
				LOW	295	250	---	---	---	---	---	---	
5RHBC-41 -32	1/12	1050	1.3	HI	505	450	395	335	---	---	---	---	
				MED	445	400	350	295	---	---	---	---	
				LOW	325	300	270	---	---	---	---	---	
6RHBC-41 -32	1/8	1550	1.9	HI	665	625	590	555	515	480	---	---	
				MED	605	570	535	505	470	430	---	---	
				LOW	535	505	470	440	405	370	---	---	
8RHBC-41 -32	1/5	1550	3.0	HI	845	810	780	750	715	680	640	605	
				MED	725	700	670	640	610	580	550	520	455
				LOW	605	580	560	535	505	480	455	425	370
10RHBC-41 -32	1/4	1550	3.6	HI	1015	975	940	900	865	825	785	750	670
				MED	890	855	825	795	765	735	700	665	590
				LOW	770	740	710	685	660	630	600	570	510
13RHBC-41 -32	1/5 (two)	1550	2.3 Ea.	HI	1295	1245	1195	1145	1090	1035	975	915	795
				MED	1215	1165	1120	1065	1015	960	905	845	725
				LOW	1120	1075	1025	975	930	885	835	785	655

Notes:

1. Motors are 120v / 60Hz, high efficiency PSC type
2. Maximum HACR breaker is 15 amp
3. Coil fins-per-inch varies to allow consistent air flow
4. (4) The size 3 motor (models 3(P/R/C)HBC) may not start on low speed due to low starting torque. These units must be wired to start on either Medium or High speed.

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE HBC 277 VOLT PSC

HBC (277 Volt)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 277 Volt)													
MODEL	HP	MAX RPM	AMPS (277V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3"HBC-3	1/20	1100	0.48	HI	315	285	255	---	---	---	---	---	---
				MED	245	220	195	---	---	---	---	---	---
				LOW	180	160	---	---	---	---	---	---	---
4"HBC-3	1/15	1050	0.52	HI	510	450	390	---	---	---	---	---	---
				MED	410	365	305	---	---	---	---	---	---
				LOW	350	315	265	---	---	---	---	---	---
5"HBC-3	1/15	1050	0.52	HI	575	535	490	---	---	---	---	---	---
				MED	405	375	340	---	---	---	---	---	---
				LOW	335	305	275	---	---	---	---	---	---
6"HBC-3	1/812	1625	0.56	HI	700	670	640	615	590	560	530	495	---
				MED	570	545	520	490	465	430	400	360	---
				LOW	475	455	430	400	370	340	300	255	---
8"HBC-3	1/6	1550	0.80	HI	905	880	855	830	800	765	725	685	---
				MED	720	700	675	650	625	595	565	535	---
				LOW	605	585	560	530	505	475	450	420	---
10"HBC-3	1/4	1625	1.526	HI	1170	1140	1105	1070	1035	995	950	905	---
				MED	945	920	900	875	850	820	785	740	---
				LOW	780	755	730	705	680	655	625	590	---
13"HBC-3	1/6 (two)	1550	0.80 Ea.	HI	1580	1535	1490	1450	1400	1355	1300	1245	1130
				MED	1380	1340	1300	1260	1215	1170	1125	1075	960
				LOW	1180	1140	1105	1070	1030	990	945	895	775
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 277 Volt)													
3"HBC-4 -31	1/20	1100	0.48	HI	300	270	---	---	---	---	---	---	---
				MED	240	215	---	---	---	---	---	---	---
				LOW	195	175	---	---	---	---	---	---	---
4"HBC-4 -31	1/15	1050	0.52	HI	485	435	380	---	---	---	---	---	---
				MED	395	355	300	---	---	---	---	---	---
				LOW	350	315	265	---	---	---	---	---	---
5"HBC-4 -31	1/125	1050	0.52	HI	565	525	480	---	---	---	---	---	---
				MED	390	360	325	---	---	---	---	---	---
				LOW	330	300	270	---	---	---	---	---	---
6"HBC-4 -31	1/12	1625	0.56	HI	700	665	635	600	575	545	510	470	---
				MED	570	540	515	490	465	435	400	355	---
				LOW	470	445	420	390	360	330	290	255	---
8"HBC-4 -31	1/6	1550	0.80	HI	865	835	805	780	745	710	670	625	---
				MED	705	680	660	630	605	570	535	495	---
				LOW	580	555	535	505	475	445	415	395	---
10"HBC-4 -31	1/4	1625	1.526	HI	1140	1100	1065	1025	990	950	915	880	---
				MED	915	890	870	845	820	790	755	715	---
				LOW	770	745	720	695	670	640	615	585	---
13"HBC-4 -31	1/6 (two)	1550	0.80 Ea.	HI	1510	1465	1420	1370	1325	1275	1225	1170	1050
				MED	1320	1280	1245	1205	1165	1120	1075	1025	905
				LOW	1140	1110	1075	1040	1005	965	920	865	745
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 277 Volt)													
3"HBC-41 -32	1/20	1100	0.48	HI	295	265	---	---	---	---	---	---	---
				MED	235	210	---	---	---	---	---	---	---
				LOW	190	160	---	---	---	---	---	---	---
4"HBC-41 -32	1/15	1050	0.52	HI	485	440	390	---	---	---	---	---	---
				MED	400	360	310	---	---	---	---	---	---
				LOW	345	315	270	---	---	---	---	---	---
5"HBC-41 -32	1/15	1050	0.52	HI	525	475	430	---	---	---	---	---	---
				MED	385	350	310	---	---	---	---	---	---
				LOW	320	285	250	---	---	---	---	---	---
6"HBC-41 -32	1/12	1625	0.56	HI	660	630	600	575	545	515	480	---	---
				MED	540	510	485	460	430	395	360	---	---
				LOW	455	430	405	380	350	315	280	---	---
8"HBC-41 -32	1/6	1550	0.80	HI	865	830	800	775	740	705	665	625	---
				MED	690	660	630	605	575	545	515	485	---
				LOW	580	550	525	495	470	440	415	385	---
10"HBC-41 -32	1/4	1625	1.26	HI	1100	1065	1030	995	950	900	850	795	---
				MED	940	905	870	845	820	790	750	675	---
				LOW	770	750	730	710	685	645	600	454	---
13"HBC-41 -32	1/6 (two)	1550	0.80 Ea.	HI	1460	1415	1365	1320	1270	1225	1175	1120	1005
				MED	1285	1245	1210	1170	1125	1085	1035	985	855
				LOW	1130	1090	1050	1005	970	930	885	840	710

- Notes:**
1. Motors are 277v / 60Hz, high efficiency PSC type
 2. Maximum HACR breaker is 15 amp
 3. coil fins-per-inch varies to allow consistent air flow

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE PHBC 277 VOLT PSC

PHBC (277 Volt)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 277 Volt)													
MODEL	HP	MAX RPM	AMPS (277V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3*PHBC-3	1/20	1100	0.48	HI	290	260	---	---	---	---	---	---	---
				MED	230	200	---	---	---	---	---	---	---
				LOW	180	155	---	---	---	---	---	---	---
4*PHBC-3	1/15	1050	0.52	HI	395	340	---	---	---	---	---	---	---
				MED	345	295	---	---	---	---	---	---	---
				LOW	310	265	---	---	---	---	---	---	---
5*PHBC-3	1/15	1050	0.52	HI	500	460	415	---	---	---	---	---	---
				MED	385	350	310	---	---	---	---	---	---
				LOW	330	295	260	---	---	---	---	---	---
6*PHBC-3	1/12	1625	0.56	HI	665	630	595	565	540	510	475	430	---
				MED	545	515	490	465	440	410	375	335	---
				LOW	460	430	400	375	350	320	290	250	---
8*PHBC-3	1/6	1550	0.80	HI	850	820	790	760	725	685	645	605	---
				MED	695	665	640	610	585	555	525	490	---
				LOW	575	550	525	500	470	445	420	395	---
10*PHBC-3	1/4	1625	1.26	HI	1040	1000	960	920	885	850	810	775	---
				MED	885	850	810	780	745	720	690	665	---
				LOW	710	680	655	635	610	590	565	540	---
13*PHBC-3	1/6 (two)	1550	0.80 Ea.	HI	1385	1340	1295	1250	1205	1155	1100	1040	905
				MED	1250	1210	1170	1130	1085	1040	985	930	795
				LOW	1110	1070	1030	990	945	900	850	800	675
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 277 Volt)													
3*PHBC-4-31	1/20	1100	0.48	HI	280	255	---	---	---	---	---	---	---
				MED	230	200	---	---	---	---	---	---	---
				LOW	185	160	---	---	---	---	---	---	---
4*PHBC-4-31	1/15	1050	0.52	HI	395	340	---	---	---	---	---	---	---
				MED	345	295	---	---	---	---	---	---	---
				LOW	305	255	---	---	---	---	---	---	---
5*PHBC-4-31	1/15	1050	0.52	HI	500	455	405	---	---	---	---	---	---
				MED	380	340	305	---	---	---	---	---	---
				LOW	330	295	260	---	---	---	---	---	---
6*PHBC-4-31	1/12	1625	0.56	HI	650	615	585	555	525	490	450	405	---
				MED	540	510	480	450	425	390	355	320	---
				LOW	460	430	400	375	345	315	280	240	---
8*PHBC-4-31	1/6	1550	0.80	HI	825	790	760	725	685	650	610	570	---
				MED	670	640	615	585	560	530	495	465	---
				LOW	560	530	500	475	445	420	395	365	---
10*PHBC-4-31	1/4	1625	1.26	HI	1020	980	940	905	865	830	790	750	---
				MED	890	855	820	790	755	725	695	660	---
				LOW	740	710	685	660	635	610	585	555	---
13*PHBC-4-31	1/6 (two)	1550	0.80 Ea.	HI	1335	1290	1245	1200	1155	1105	1045	985	835
				MED	1205	1170	1135	1095	1050	1000	940	875	755
				LOW	1075	1040	1000	960	915	870	820	765	645
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 277 Volt)													
3*PHBC-41-32	1/20	1100	0.48	HI	275	245	---	---	---	---	---	---	---
				MED	225	200	---	---	---	---	---	---	---
				LOW	185	155	---	---	---	---	---	---	---
4*PHBC-41-32	1/15	1050	0.52	HI	395	345	---	---	---	---	---	---	---
				MED	340	300	---	---	---	---	---	---	---
				LOW	300	260	---	---	---	---	---	---	---
5*PHBC-41-32	1/15	1050	0.52	HI	465	405	365	---	---	---	---	---	---
				MED	365	325	280	---	---	---	---	---	---
				LOW	305	270	235	---	---	---	---	---	---
6*PHBC-41-32	1/12	1625	0.56	HI	610	580	550	520	485	450	415	370	---
				MED	515	485	455	430	400	370	335	300	---
				LOW	440	410	385	355	325	295	260	215	---
8*PHBC-41-32	1/6	1550	0.80	HI	805	775	740	710	675	640	605	570	---
				MED	665	635	605	575	550	520	490	460	---
				LOW	560	530	505	475	450	425	400	370	---
10*PHBC-41-32	1/4	1625	1.26	HI	990	950	915	885	850	815	760	690	---
				MED	875	835	805	775	745	715	680	620	---
				LOW	735	700	675	650	625	595	560	510	---
13*PHBC-41-32	1/6 (two)	1550	0.80 Ea.	HI	1285	1240	1195	1150	1100	1045	990	925	795
				MED	1170	1130	1090	1050	1005	955	900	840	730
				LOW	1045	1010	975	940	895	845	795	735	625

- Notes:**
1. Motors are 277v / 60Hz, high efficiency PSC type
 2. Maximum HACR breaker is 15 amp
 3. coil fins-per-inch varies to allow consistent air flow

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE RHBC 277 VOLT PSC

RHBC (277 Volt)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 277 Volt)													
MODEL	HP	MAX RPM	AMPS (277V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3*RHBC-3	1/20	1100	0.48	HI	290	260	---	---	---	---	---	---	---
				MED	230	200	---	---	---	---	---	---	---
				LOW	180	155	---	---	---	---	---	---	---
4*RHBC-3	1/15	1050	0.52	HI	395	340	---	---	---	---	---	---	---
				MED	345	295	---	---	---	---	---	---	---
				LOW	310	265	---	---	---	---	---	---	---
5*RHBC-3	1/15	1050	0.52	HI	500	460	415	---	---	---	---	---	---
				MED	385	350	310	---	---	---	---	---	---
				LOW	330	295	260	---	---	---	---	---	---
6*RHBC-3	1/12	1625	0.56	HI	665	630	595	565	540	510	475	430	---
				MED	545	515	490	465	440	410	375	335	---
				LOW	460	430	400	375	350	320	290	250	---
8*RHBC-3	1/6	1550	0.80	HI	850	820	790	760	725	685	645	605	---
				MED	695	665	640	610	585	555	525	490	---
				LOW	575	550	525	500	470	445	420	395	---
10*RHBC-3	1/4	1625	1.26	HI	1040	1000	960	920	885	850	810	775	---
				MED	885	850	810	780	745	720	690	665	---
				LOW	710	680	655	635	610	590	565	540	---
13*RHBC-3	1/6 (two)	1550	0.80 Ea.	HI	1385	1340	1295	1250	1205	1155	1100	1040	905
				MED	1250	1210	1170	1130	1085	1040	985	930	765
				LOW	1110	1070	1030	990	945	900	850	800	675
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 277 Volt)													
3*RHBC-4 -31	1/20	1100	0.48	HI	280	255	---	---	---	---	---	---	---
				MED	230	200	---	---	---	---	---	---	---
				LOW	185	160	---	---	---	---	---	---	---
4*RHBC-4 -31	1/15	1050	0.52	HI	395	340	---	---	---	---	---	---	---
				MED	345	295	---	---	---	---	---	---	---
				LOW	305	255	---	---	---	---	---	---	---
5*RHBC-4 -31	1/15	1050	0.52	HI	500	455	405	---	---	---	---	---	---
				MED	380	340	305	---	---	---	---	---	---
				LOW	330	295	260	---	---	---	---	---	---
6*RHBC-4 -31	1/12	1625	0.56	HI	650	615	585	555	525	490	450	405	---
				MED	540	510	480	450	425	390	355	320	---
				LOW	460	430	400	375	345	315	280	240	---
8*RHBC-4 -31	1/6	1550	0.80	HI	825	790	760	725	685	650	610	570	---
				MED	670	640	615	585	560	530	495	465	---
				LOW	560	530	500	475	445	420	395	365	---
10*RHBC-4 -31	1/4	1625	1.26	HI	1020	980	940	905	865	830	790	750	---
				MED	890	855	820	790	755	725	685	660	---
				LOW	740	710	685	660	635	610	585	555	---
13*RHBC-4 -31	1/6 (two)	1550	0.80 Ea.	HI	1335	1290	1245	1200	1155	1105	1045	985	835
				MED	1205	1170	1135	1095	1050	1000	940	875	755
				LOW	1075	1040	1000	960	915	870	820	765	645
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 277 Volt)													
3*RHBC-41 -32	1/20	1100	0.48	HI	275	245	---	---	---	---	---	---	---
				MED	225	200	---	---	---	---	---	---	---
				LOW	185	155	---	---	---	---	---	---	---
4*RHBC-41 -32	1/15	1050	0.52	HI	395	345	---	---	---	---	---	---	---
				MED	340	300	---	---	---	---	---	---	---
				LOW	300	260	---	---	---	---	---	---	---
5*RHBC-41 -32	1/15	1050	0.52	HI	465	415	365	---	---	---	---	---	---
				MED	365	325	280	---	---	---	---	---	---
				LOW	305	270	235	---	---	---	---	---	---
6*RHBC-41 -32	1/12	1625	0.56	HI	610	580	550	520	485	450	415	370	---
				MED	515	485	455	430	400	370	335	300	---
				LOW	440	410	385	355	325	295	260	215	---
8*RHBC-41 -32	1/6	1550	0.80	HI	805	775	740	710	675	640	605	570	---
				MED	665	635	605	575	550	520	490	460	---
				LOW	560	530	505	475	450	425	400	370	---
10*RHBC-41 -32	1/4	1625	1.26	HI	990	950	915	885	850	815	760	690	---
				MED	875	835	805	775	745	715	680	620	---
				LOW	735	700	675	650	625	595	560	510	---
13*RHBC-41 -32	1/6 (two)	1550	0.80 Ea.	HI	1285	1240	1195	1150	1100	1045	990	925	795
				MED	1170	1130	1090	1050	1005	955	900	840	730
				LOW	1045	1010	975	940	895	845	795	735	625

- Notes:**
1. Motors are 277v / 60Hz, high efficiency PSC type
 2. Maximum HACR breaker is 15 amp
 3. coil fins-per-inch varies to allow consistent air flow

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE HBC 220 VOLT/ 50Hz PSC

HBC (220 Volt / 50Hz)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 220 Volt)													
MODEL	HP	MAX RPM	AMPS (220V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3*HBC-3	1/20	1075	0.40	HI	240	220	---	---	---	---	---	---	---
				MED	205	175	---	---	---	---	---	---	---
				LOW	155	---	---	---	---	---	---	---	---
4*HBC-3	1/12	1050	0.55	HI	470	430	390	335	---	---	---	---	---
				MED	380	340	300	250	---	---	---	---	---
				LOW	310	265	220	---	---	---	---	---	---
5*HBC-3	1/12	1050	0.55	HI	455	405	355	---	---	---	---	---	---
				MED	365	325	275	---	---	---	---	---	---
				LOW	285	245	210	---	---	---	---	---	---
6*HBC-3	1/5	1550	1.02	HI	675	630	585	540	495	450	---	---	---
				MED	570	530	495	455	415	365	---	---	---
				LOW	490	455	415	370	320	265	---	---	---
8*HBC-3	1/5	1550	1.02	HI	860	825	790	750	715	675	630	---	---
				MED	630	610	585	560	535	500	455	---	---
				LOW	435	415	400	375	350	320	---	---	---
10*HBC-3	1/4	1625	1.53	HI	1080	1025	975	915	860	795	735	665	---
				MED	850	815	775	735	685	635	575	520	---
				LOW	675	645	615	580	540	500	455	410	---
13*HBC-3	1/5 (two)	1550	1.02 Ea.	HI	1355	1295	1225	1160	1100	1030	955	865	---
				MED	1165	1115	1070	1020	965	895	810	710	---
				LOW	890	865	830	795	745	690	615	520	---
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 220 Volt)													
3*HBC-4 -31	1/20	1075	0.40	HI	240	215	---	---	---	---	---	---	---
				MED	205	180	---	---	---	---	---	---	---
				LOW	160	---	---	---	---	---	---	---	---
4*HBC-4 -31	1/12	1050	0.55	HI	460	425	390	345	---	---	---	---	---
				MED	380	345	300	255	---	---	---	---	---
				LOW	305	265	225	---	---	---	---	---	---
5*HBC-4 -31	1/12	1050	0.55	HI	440	395	345	---	---	---	---	---	---
				MED	360	320	275	---	---	---	---	---	---
				LOW	310	245	200	---	---	---	---	---	---
6*HBC-4 -31	1/5	1550	1.02	HI	665	620	575	535	490	440	---	---	---
				MED	575	535	495	460	420	370	---	---	---
				LOW	485	450	415	370	310	250	---	---	---
8*HBC-4 -31	1/5	1550	1.02	HI	810	765	725	690	650	610	565	---	---
				MED	615	585	560	530	495	460	415	---	---
				LOW	420	400	385	365	340	300	---	---	---
10*HBC-4 -31	1/4	1625	1.53	HI	1015	965	915	865	815	760	700	640	---
				MED	875	840	805	765	720	670	615	555	---
				LOW	730	695	665	625	585	540	475	390	---
13*HBC-4 -31	1/5 (two)	1550	1.02 Ea.	HI	1240	1185	1125	1065	1000	920	830	730	---
				MED	1085	1035	990	930	860	775	680	590	---
				LOW	860	830	795	745	685	610	525	440	---
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 220 Volt)													
3*HBC-41 -32	1/20	1075	0.40	HI	235	210	---	---	---	---	---	---	---
				MED	200	170	---	---	---	---	---	---	---
				LOW	160	---	---	---	---	---	---	---	---
4*HBC-41 -32	1/12	1050	0.55	HI	450	410	370	---	---	---	---	---	---
				MED	365	325	290	---	---	---	---	---	---
				LOW	295	255	220	---	---	---	---	---	---
5*HBC-41 -32	1/12	1050	0.55	HI	425	375	325	---	---	---	---	---	---
				MED	350	305	260	---	---	---	---	---	---
				LOW	280	240	200	---	---	---	---	---	---
6*HBC-41 -32	1/5	1550	1.02	HI	605	570	535	495	450	395	---	---	---
				MED	535	500	465	425	385	330	---	---	---
				LOW	460	420	380	345	300	---	---	---	---
8*HBC-41 -32	1/5	1550	1.02	HI	805	760	720	680	645	610	565	---	---
				MED	620	590	560	530	495	460	420	---	---
				LOW	425	405	390	365	340	305	---	---	---
10*HBC-41 -32	1/4	1625	1.53	HI	985	940	895	850	790	725	645	555	---
				MED	875	835	795	755	710	650	580	485	---
				LOW	715	690	660	625	580	535	490	450	---
13*HBC-41 -32	1/5 (two)	1550	1.02 Ea.	HI	1195	1140	1085	1025	960	885	795	690	---
				MED	1060	1010	955	900	830	750	660	555	---
				LOW	835	805	770	720	665	590	510	415	---

- Notes:**
1. Motors are 220v / 50Hz, high efficiency PSC type
 2. Maximum HACR breaker is 15 amp
 3. coil fins-per-inch varies to allow consistent air flow

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE PHBC 220 VOLT/ 50Hz PSC

PHBC (220 Volt / 50Hz)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 220 Volt)													
MODEL	HP	MAX RPM	AMPS (220V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3*PHBC-3	1/20	1075	0.40	HI	230	200	---	---	---	---	---	---	---
				MED	195	160	---	---	---	---	---	---	---
				LOW	150	---	---	---	---	---	---	---	---
4*PHBC-3	1/12	1050	0.55	HI	420	380	335	---	---	---	---	---	---
				MED	350	305	265	---	---	---	---	---	---
				LOW	275	240	200	---	---	---	---	---	---
5*PHBC-3	1/12	1050	0.55	HI	410	365	---	---	---	---	---	---	---
				MED	340	295	---	---	---	---	---	---	---
				LOW	270	230	---	---	---	---	---	---	---
6*PHBC-3	1/5	1550	1.02	HI	585	540	500	455	410	---	---	---	---
				MED	520	480	440	400	350	---	---	---	---
				LOW	455	415	375	325	275	---	---	---	---
8*PHBC-3	1/5	1550	1.02	HI	795	750	700	660	620	580	535	---	---
				MED	605	580	555	530	500	460	410	---	---
				LOW	425	405	390	365	340	---	---	---	---
10*PHBC-3	1/4	1625	1.53	HI	920	865	810	755	700	650	595	545	---
				MED	825	775	730	680	635	585	540	490	---
				LOW	685	640	605	570	535	495	440	365	---
13*PHBC-3	1/5 (two)	1550	1.02 Ea.	HI	1165	1110	1055	1000	935	860	775	680	---
				MED	1050	1000	945	890	825	760	680	580	---
				LOW	855	815	775	730	680	625	555	465	---
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 220 Volt)													
3*PHBC-4 -31	1/20	1075	0.40	HI	225	200	---	---	---	---	---	---	---
				MED	190	165	---	---	---	---	---	---	---
				LOW	150	---	---	---	---	---	---	---	---
4*PHBC-4 -31	1/12	1050	0.55	HI	405	370	330	---	---	---	---	---	---
				MED	340	310	275	---	---	---	---	---	---
				LOW	275	240	200	---	---	---	---	---	---
5*PHBC-4 -31	1/12	1050	0.55	HI	410	365	---	---	---	---	---	---	---
				MED	330	290	---	---	---	---	---	---	---
				LOW	270	225	---	---	---	---	---	---	---
6*PHBC-4 -31	1/5	1550	1.02	HI	585	545	505	460	410	355	---	---	---
				MED	520	480	440	395	345	295	---	---	---
				LOW	455	415	370	325	280	225	---	---	---
8*PHBC-4 -31	1/5	1550	1.02	HI	745	705	665	625	580	535	485	---	---
				MED	590	560	535	500	465	420	370	---	---
				LOW	415	395	375	355	325	285	240	---	---
10*PHBC-4 -31	1/4	1625	1.53	HI	865	815	770	725	675	625	570	---	---
				MED	785	735	695	650	610	570	520	---	---
				LOW	665	630	595	560	520	475	420	---	---
13*PHBC-4 -31	1/5 (two)	1550	1.02 Ea.	HI	1080	1020	965	905	835	760	670	---	---
				MED	985	930	870	810	745	665	585	---	---
				LOW	825	785	740	685	625	555	475	---	---
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 220 Volt)													
3*PHBC-41 -32	1/20	1075	0.40	HI	225	195	---	---	---	---	---	---	---
				MED	190	160	---	---	---	---	---	---	---
				LOW	145	---	---	---	---	---	---	---	---
4*PHBC-41 -32	1/12	1050	0.55	HI	395	355	315	---	---	---	---	---	---
				MED	330	295	260	---	---	---	---	---	---
				LOW	260	215	170	---	---	---	---	---	---
5*PHBC-41 -32	1/12	1050	0.55	HI	395	345	---	---	---	---	---	---	---
				MED	325	285	---	---	---	---	---	---	---
				LOW	265	225	---	---	---	---	---	---	---
6*PHBC-41 -32	1/5	1550	1.02	HI	535	495	460	415	370	---	---	---	---
				MED	485	445	405	365	320	---	---	---	---
				LOW	430	390	350	305	260	---	---	---	---
8*PHBC-41 -32	1/5	1550	1.02	HI	740	700	660	615	575	525	---	---	---
				MED	590	560	530	500	470	430	---	---	---
				LOW	420	400	380	360	330	300	---	---	---
10*PHBC-41 -32	1/4	1625	1.53	HI	850	800	755	705	655	600	540	---	---
				MED	785	735	680	635	590	545	490	---	---
				LOW	660	615	575	540	505	465	410	---	---
13*PHBC-41 -32	1/5 (two)	1550	1.02 Ea.	HI	1030	975	920	860	790	715	630	---	---
				MED	950	895	835	775	705	630	550	---	---
				LOW	800	755	705	650	595	530	455	---	---

PSC MOTOR

- Notes:**
1. Motors are 220v / 50Hz, high efficiency PSC type
 2. Maximum HACR breaker is 15 amp
 3. coil fins-per-inch varies to allow consistent air flow

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE RHBC 220 VOLT/ 50Hz PSC

RHBC (220 Volt / 50Hz)													
CFM vs EXTERNAL STATIC PRESSURE (3 ROW 220 Volt)													
MODEL	HP	MAX RPM	AMPS (220V)	FAN SPEED	EXTERNAL STATIC PRESSURE (inches of water)								
					0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50
3*RHBC-3	1/20	1075	0.40	HI	230	200	---	---	---	---	---	---	---
				MED	195	160	---	---	---	---	---	---	---
				LOW	150	---	---	---	---	---	---	---	---
4*RHBC-3	1/12	1050	0.55	HI	420	380	335	---	---	---	---	---	---
				MED	350	305	265	---	---	---	---	---	---
				LOW	275	240	200	---	---	---	---	---	---
5*RHBC-3	1/12	1050	0.55	HI	410	365	---	---	---	---	---	---	---
				MED	340	295	---	---	---	---	---	---	---
				LOW	270	230	---	---	---	---	---	---	---
6*RHBC-3	1/5	1550	1.02	HI	585	540	500	455	410	---	---	---	---
				MED	520	480	440	400	350	---	---	---	---
				LOW	455	415	375	325	275	---	---	---	---
8*RHBC-3	1/5	1550	1.02	HI	795	750	700	660	620	580	535	---	---
				MED	605	580	555	530	500	460	410	---	---
				LOW	425	405	390	365	340	---	---	---	---
10*RHBC-3	1/4	1625	1.53	HI	920	865	810	755	700	650	595	545	---
				MED	825	775	730	680	635	585	540	490	---
				LOW	685	640	605	570	535	495	440	365	---
13*RHBC-3	1/5 (two)	1550	1.02 Ea.	HI	1165	1110	1055	1000	935	860	775	680	---
				MED	1050	1000	945	890	825	760	680	580	---
				LOW	855	815	775	730	680	625	555	465	---
CFM vs EXTERNAL STATIC PRESSURE (4 ROW or 3/1 Split 220 Volt)													
3*RHBC-4-31	1/20	1075	0.40	HI	225	200	---	---	---	---	---	---	---
				MED	190	165	---	---	---	---	---	---	---
				LOW	150	---	---	---	---	---	---	---	---
4*RHBC-4-31	1/12	1050	0.55	HI	405	370	330	---	---	---	---	---	---
				MED	340	310	275	---	---	---	---	---	---
				LOW	275	240	200	---	---	---	---	---	---
5*RHBC-4-31	1/12	1050	0.55	HI	410	365	---	---	---	---	---	---	---
				MED	330	290	---	---	---	---	---	---	---
				LOW	270	225	---	---	---	---	---	---	---
6*RHBC-4-31	1/5	1550	1.02	HI	585	545	505	460	410	355	---	---	---
				MED	520	480	440	395	345	295	---	---	---
				LOW	455	415	370	325	280	225	---	---	---
8*RHBC-4-31	1/5	1550	1.02	HI	745	705	665	625	580	535	485	---	---
				MED	590	560	535	500	465	420	370	---	---
				LOW	415	395	375	355	325	285	240	---	---
10*RHBC-4-31	1/4	1625	1.53	HI	865	815	770	725	675	625	570	---	---
				MED	785	735	695	650	610	570	520	---	---
				LOW	665	630	595	560	520	475	420	---	---
13*RHBC-4-31	1/5 (two)	1550	1.02 Ea.	HI	1080	1020	965	905	835	760	670	---	---
				MED	985	930	870	810	745	665	585	---	---
				LOW	825	785	740	685	625	555	475	---	---
CFM vs EXTERNAL STATIC PRESSURE (4/1 or 3/2 Split 220 Volt)													
3*RHBC-41-32	1/20	1075	0.40	HI	225	195	---	---	---	---	---	---	---
				MED	190	160	---	---	---	---	---	---	---
				LOW	145	---	---	---	---	---	---	---	---
4*RHBC-41-32	1/12	1050	0.55	HI	395	355	315	---	---	---	---	---	---
				MED	330	295	260	---	---	---	---	---	---
				LOW	260	215	170	---	---	---	---	---	---
5*RHBC-41-32	1/12	1050	0.55	HI	395	345	---	---	---	---	---	---	---
				MED	325	285	---	---	---	---	---	---	---
				LOW	265	225	---	---	---	---	---	---	---
6*RHBC-41-32	1/5	1550	1.02	HI	535	495	460	415	370	---	---	---	---
				MED	485	445	405	365	320	---	---	---	---
				LOW	430	390	350	305	260	---	---	---	---
8*RHBC-41-32	1/5	1550	1.02	HI	740	700	660	615	575	525	---	---	---
				MED	590	560	530	500	470	430	---	---	---
				LOW	420	400	380	360	330	---	---	---	---
10*RHBC-41-32	1/4	1625	1.53	HI	850	800	755	705	655	600	540	---	---
				MED	785	735	680	635	590	545	490	---	---
				LOW	660	615	575	540	505	465	410	---	---
13*RHBC-41-32	1/5 (two)	1550	1.02 Ea.	HI	1030	975	920	860	790	715	630	---	---
				MED	950	895	835	775	705	630	550	---	---
				LOW	800	755	705	650	595	530	455	---	---

- Notes:**
1. Motors are 220v / 50Hz, high efficiency PSC type
 2. Maximum HACR breaker is 15 amp
 3. coil fins-per-inch varies to allow consistent air flow

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE CHBC (ALL) PSC

PSC MOTOR	CHBC (120 Volt)						CHBC (277 Volt)						CHBC (220 Volt / 50Hz)					
	(3 ROW 120 Volt)						(3 ROW 277 Volt)						(3 ROW 220 Volt / 50Hz)					
	MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	CFM	MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	CFM	MODEL	HP	MAX RPM	AMPS (120V)	FAN SPEED	CFM
	3*CHBC-3	1/20	1050	.09	HI MED LOW	300 245 210	3*CHBC-3	1/20	1100	0.48	HI MED LOW	285 220 160	3*CHBC-3	1/20	1075	0.40	HI MED LOW	225 175 125
	4*CHBC-3	1/12	1050	1.1	HI MED LOW	480 375 325	4*CHBC-3	1/15	105	0.52	HI MED LOW	450 365 315	4*CHBC-3	1/12	1050	0.55	HI MED LOW	430 340 265
	5*CHBC-3	1/12	1050	1.3	HI MED LOW	560 465 345	5*CHBC-3	1/15	1050	0.52	HI MED LOW	535 375 305	5*CHBC-3	1/12	1050	0.55	HI MED LOW	405 325 245
	6*CHBC-3	1/8	1550	1.9	HI MED LOW	730 650 550	6*CHBC-3	1/12	1625	0.56	HI MED LOW	670 545 455	6*CHBC-3	1/5	1550	1.02	HI MED LOW	630 530 455
	8*CHBC-3	1/5	1550	3.0	HI MED LOW	920 750 605	8*CHBC-3	1/6	1550	0.80	HI MED LOW	880 700 585	8*CHBC-3	1/5	1550	1.02	HI MED LOW	825 610 415
	10*CHBC-3	1/4	1550	3.6	HI MED LOW	1145 930 795	10*CHBC-3	1/4	1625	1.26	HI MED LOW	1140 920 755	10*CHBC-3	1/4	1625	1.53	HI MED LOW	1025 815 645
	13*CHBC-3	1/5 (two)	1550	2.3 Ea.	HI MED LOW	1500 1320 1160	13*CHBC-3	1/6 (two)	1550	0.80 Ea.	HI MED LOW	1535 1340 1140	13*CHBC-3	1/5 (two)	1550	1.02 Ea.	HI MED LOW	1295 1115 865
	(4 ROW or 3/1 Split 120 Volt)						(4 ROW or 3/1 Split 277 Volt)						(4 ROW or 3/1 Split 220 Volt / 50Hz)					
	3*CHBC-4-31	1/20	1050	0.9	HI MED LOW	280 230 195	3*CHBC-4-31	1/20	1100	0.48	HI MED LOW	270 215 175	3*CHBC-4-31	1/20	1075	0.40	HI MED LOW	225 180 130
	4*CHBC-4-31	1/12	1050	1.1	HI MED LOW	450 370 320	4*CHBC-4-31	1/15	1050	0.52	HI MED LOW	435 355 315	4*CHBC-4-31	1/12	1050	0.55	HI MED LOW	425 345 265
	5*CHBC-4-31	1/12	1050	1.3	HI MED LOW	550 455 340	5*CHBC-4-31	1/15	1050	0.52	HI MED LOW	525 360 300	5*CHBC-4-31	1/12	1050	0.55	HI MED LOW	395 320 245
	6*CHBC-4-31	1/8	1550	1.9	HI MED LOW	710 615 535	6*CHBC-4-31	1/12	1625	0.56	HI MED LOW	665 540 445	6*CHBC-4-31	1/5	1550	1.02	HI MED LOW	620 535 450
	8*CHBC-4-31	1/5	1550	3.0	HI MED LOW	885 730 595	8*CHBC-4-31	1/6	1550	0.80	HI MED LOW	835 680 555	8*CHBC-4-31	1/5	1550	1.02	HI MED LOW	765 585 400
	10*CHBC-4-31	1/4	1550	3.6	HI MED LOW	1110 915 770	10*CHBC-4-31	1/4	1625	1.26	HI MED LOW	1100 890 745	10*CHBC-4-31	1/4	1625	1.53	HI MED LOW	965 840 695
	13*CHBC-4-31	1/5 (two)	1550	2.3 Ea.	HI MED LOW	1450 1270 1130	13*CHBC-4-31	1/56 (two)	1550	0.80 Ea.	HI MED LOW	1465 1280 1110	13*CHBC-4-31	1/5 (two)	1550	1.02 Ea.	HI MED LOW	1185 1035 830
	(4/1 or 3/2 Split 120 Volt)						(4/1 or 3/2 Split 277 Volt)						(4/1 or 3/2 Split 220 Volt / 50Hz)					
	3*CHBC-41-32	1/20	1050	0.9	HI MED LOW	270 225 190	3*CHBC-41-32	1/20	1100	0.48	HI MED LOW	265 210 160	3*CHBC-41-32	1/20	1075	0.40	HI MED LOW	225 175 125
	4*CHBC-41-32	1/12	1050	1.1	HI MED LOW	420 355 305	4*CHBC-41-32	1/15	1050	0.52	HI MED LOW	440 355 315	4*CHBC-41-32	1/12	1050	0.55	HI MED LOW	410 325 255
	5*CHBC-41-32	1/12	1050	1.3	HI MED LOW	520 440 325	5*CHBC-41-32	1/15	1050	0.52	HI MED LOW	480 350 285	5*CHBC-41-32	1/12	1050	0.55	HI MED LOW	375 305 240
	6*CHBC-41-32	1/8	1550	1.9	HI MED LOW	625 520 440	6*CHBC-41-32	1/12	1625	0.56	HI MED LOW	630 510 430	6*CHBC-41-32	1/5	1550	1.02	HI MED LOW	570 500 420
	8*CHBC-41-32	1/5	1550	3.0	HI MED LOW	875 725 615	8*CHBC-41-32	1/6	1550	0.80	HI MED LOW	830 660 550	8*CHBC-41-32	1/5	1550	1.02	HI MED LOW	760 590 405
	10*CHBC-41-32	1/4	1550	3.6	HI MED LOW	1075 900 765	10*CHBC-41-32	1/4	1625	1.26	HI MED LOW	1065 905 750	10*CHBC-41-32	1/4	1625	1.53	HI MED LOW	940 835 690
	13*CHBC-41-32	1/5 (two)	1550	2.3 Ea.	HI MED LOW	1420 1315 1160	13*CHBC-41-32	1/6 (two)	1550	0.80 Ea.	HI MED LOW	1415 1245 1090	13*CHBC-41-32	1/5 (two)	1550	1.02 Ea.	HI MED LOW	1140 100 805

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE HBCX 120V ECM

115V/1/60 ECM MOTOR HBCX SERIES (CONCEALED) - CFM vs ESP (3-ROW)											
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4"HBCX-3	1/7	1.4	White	480	455	430	405	380	355	330	*
			Green	400	365	330	305	280	250	220	*
			Orange	350	315	280	250	220	195	170	*
			Yellow	280	235	190	155	120	*	*	*
6"HBCX-3	1/7	2.5	White	690	670	650	635	620	600	580	*
			Green	660	635	610	580	550	540	530	*
			Orange	570	545	520	500	480	455	430	*
			Yellow	480	455	430	410	390	365	340	*
8"HBCX-3	1/2	4.6	Green	980	945	910	890	870	845	820	720
			Orange	800	780	760	745	730	715	700	660
			Yellow	680	660	640	620	600	580	560	530
			Red	530	510	490	470	450	430	410	360
10"HBCX-3	1/2	4.6	White	1120	1105	1090	1075	1060	1040	1020	960
			Green	1010	995	980	960	940	925	910	880
			Orange	830	810	790	765	740	720	700	660
			Yellow	690	665	640	620	600	575	550	510
12"HBCX-3	1/2	6.2	White	1380	1365	1350	1325	1300	1285	1270	1240
			Orange	1180	1165	1150	1130	1110	1090	1070	1030
			Yellow	1080	1070	1060	1045	1030	1010	990	960
			Red	1020	1000	980	960	940	925	910	880
115V/1/60 ECM MOTOR HBCX SERIES (CONCEALED) - CFM vs ESP (4-ROW or 3/1 SPLIT)											
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4"HBCX-4 -31	1/7	1.4	White	480	455	430	405	380	355	330	*
			Green	400	365	330	305	280	250	220	*
			Orange	350	315	280	250	220	195	170	*
			Yellow	280	235	190	155	120	*	*	*
6"HBCX-4 -31	1/7	2.5	White	690	670	650	635	620	600	580	*
			Green	660	635	610	580	550	540	530	*
			Orange	570	545	520	500	480	455	430	*
			Yellow	480	455	430	410	390	365	340	*
8"HBCX-4 -31	1/2	4.6	Green	980	945	910	890	870	845	820	720
			Orange	800	780	760	745	730	715	700	660
			Yellow	680	660	640	620	600	580	560	530
			Red	530	510	490	470	450	430	410	360
10"HBCX-4 -31	1/2	4.6	White	1120	1105	1090	1075	1060	1040	1020	960
			Green	1010	995	980	960	940	925	910	880
			Orange	830	810	790	765	740	720	700	660
			Yellow	690	665	640	620	600	575	550	510
12"HBCX-4 -31	1/2	6.2	White	1380	1365	1350	1325	1300	1285	1270	1240
			Orange	1180	1165	1150	1130	1110	1090	1070	1030
			Yellow	1080	1070	1060	1045	1030	1010	990	960
			Red	1020	1000	980	960	940	925	910	880
115V/1/60 ECM MOTOR HBCX SERIES (CONCEALED) - CFM vs ESP (3/2 or 4/1 SPLIT)											
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4"HBCX-32 -41	1/7	1.4	White	480	455	430	405	380	355	330	*
			Green	400	365	330	305	280	250	220	*
			Orange	350	315	280	250	220	195	170	*
			Yellow	280	235	190	155	120	*	*	*
6"HBCX-32 -41	1/7	2.5	White	690	670	650	635	620	600	580	*
			Green	660	635	610	580	550	540	530	*
			Orange	570	545	520	500	480	455	430	*
			Yellow	480	455	430	410	390	365	340	*
8"HBCX-32 -41	1/2	4.6	Green	980	945	910	890	870	845	820	720
			Orange	800	780	760	745	730	715	700	660
			Yellow	680	660	640	620	600	580	560	530
			Red	530	510	490	470	450	430	410	360
10"HBCX-32 -41	1/2	4.6	White	1120	1105	1090	1075	1060	1040	1020	960
			Green	1010	995	980	960	940	925	910	880
			Orange	830	810	790	765	740	720	700	660
			Yellow	690	665	640	620	600	575	550	510
12"HBCX-32 -41	1/2	6.2	White	1380	1365	1350	1325	1300	1285	1270	1240
			Orange	1180	1165	1150	1130	1110	1090	1070	1030
			Yellow	1080	1070	1060	1045	1030	1010	990	960
			Red	1020	1000	980	960	940	925	910	880

In attempt to maintain CFM consistency, fins per inch (FPI) vary depending on coil rows and is reflected in CFM and capacity calculations

INCLUDES 24V TRANSFORMER,
LINE VOLTAGE TERMINAL
BLOCK, LOW VOLTAGE TERMINAL STRIP, IN
FACTORY MOUNTED CONTROL BOX

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE PHBCX 120V ECM

115V/1/60 ECM MOTOR				PHBCX SERIES (PLENUM)- CFM vs ESP (3-ROW)							
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4"PHBCX-3	1/7	1.4	White	455	430	405	380	355	330	*	*
			Green	365	330	305	280	250	220	*	*
			Orange	315	280	250	220	195	170	*	*
			Yellow	235	190	155	120	*	*	*	*
6"PHBCX-3	1/7	2.5	White	670	650	635	620	600	580	*	*
			Green	635	610	580	550	540	530	*	*
			Orange	545	520	500	480	455	430	*	*
			Yellow	455	430	410	390	365	340	*	*
8"PHBCX-3	1/2	4.6	Green	945	910	890	870	845	820	720	*
			Orange	780	760	745	730	715	700	660	*
			Yellow	660	640	620	600	580	560	530	*
			Red	510	490	470	450	430	410	360	*
10"PHBCX-3	1/2	4.6	White	1105	1090	1075	1060	1040	1020	960	*
			Green	995	980	960	940	925	910	880	*
			Orange	810	790	765	740	720	700	660	*
			Yellow	665	640	620	600	575	550	510	*
12"PHBCX-3	1/2	6.2	White	1365	1350	1325	1300	1285	1270	1240	*
			Orange	1165	1150	1130	1110	1090	1070	1030	*
			Yellow	1070	1060	1045	1030	1010	990	960	*
			Red	1000	980	960	940	925	910	880	*
115V/1/60 ECM MOTOR				PHBCX SERIES (PLENUM)- CFM vs ESP (4-ROW or 3/1 SPLIT)							
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4"PHBCX-4	1/7	1.4	White	455	430	405	380	355	330	*	*
			Green	365	330	305	280	250	220	*	*
			Orange	315	280	250	220	195	170	*	*
			Yellow	235	190	155	120	*	*	*	*
6"PHBCX-4	1/7	2.5	White	670	650	635	620	600	580	*	*
			Green	635	610	580	550	540	530	*	*
			Orange	545	520	500	480	455	430	*	*
			Yellow	455	430	410	390	365	340	*	*
8"PHBCX-4	1/2	4.6	Green	945	910	890	870	845	820	720	*
			Orange	780	760	745	730	715	700	660	*
			Yellow	660	640	620	600	580	560	530	*
			Red	510	490	470	450	430	410	360	*
10"PHBCX-4	1/2	4.6	White	1105	1090	1075	1060	1040	1020	960	*
			Green	995	980	960	940	925	910	880	*
			Orange	810	790	765	740	720	700	660	*
			Yellow	665	640	620	600	575	550	510	*
12"PHBCX-4	1/2	6.2	White	1365	1350	1325	1300	1285	1270	1240	*
			Orange	1165	1150	1130	1110	1090	1070	1030	*
			Yellow	1070	1060	1045	1030	1010	990	960	*
			Red	1000	980	960	940	925	910	880	*
115V/1/60 ECM MOTOR				PHBCX SERIES (PLENUM)- CFM vs ESP (3/2 SPLIT)							
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4"PHBCX-32	1/7	1.4	White	455	430	405	380	355	330	*	*
			Green	365	330	305	280	250	220	*	*
			Orange	315	280	250	220	195	170	*	*
			Yellow	235	190	155	120	*	*	*	*
6"PHBCX-32	1/7	2.5	White	670	650	635	620	600	580	*	*
			Green	635	610	580	550	540	530	*	*
			Orange	545	520	500	480	455	430	*	*
			Yellow	455	430	410	390	365	340	*	*
8"PHBCX-32	1/2	4.6	Green	945	910	890	870	845	820	720	*
			Orange	780	760	745	730	715	700	660	*
			Yellow	660	640	620	600	580	560	530	*
			Red	510	490	470	450	430	410	360	*
10"PHBCX-32	1/2	4.6	White	1105	1090	1075	1060	1040	1020	960	*
			Green	995	980	960	940	925	910	880	*
			Orange	810	790	765	740	720	700	660	*
			Yellow	665	640	620	600	575	550	510	*
12"PHBCX-32	1/2	6.2	White	1365	1350	1325	1300	1285	1270	1240	*
			Orange	1165	1150	1130	1110	1090	1070	1030	*
			Yellow	1070	1060	1045	1030	1010	990	960	*
			Red	1000	980	960	940	925	910	880	*

ECM MOTOR

In attempt to maintain CFM consistency, fins per inch (FPI) vary depending on coil rows and is reflected in CFM and capacity calculations

INCLUDES 24V TRANSFORMER,
LINE VOLTAGE TERMINAL
BLOCK, LOW VOLTAGE TERMINAL STRIP, IN
FACTORY MOUNTED CONTROL BOX

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

BLOWER PERFORMANCE RHBCX 120V ECM

115V/1/60 ECM MOTOR RHBCX SERIES (RECESSED) - CFM vs ESP (3-ROW)											
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4RHBCX-3	1/7	1.4	White	430	405	380	355	330	*	*	*
			Green	330	305	280	250	220	*	*	*
			Orange	280	250	220	195	170	*	*	*
			Yellow	190	155	120	*	*	*	*	*
6RHBCX-3	1/7	2.5	White	650	635	620	600	580	*	*	*
			Green	610	580	550	540	530	*	*	*
			Orange	520	500	480	455	430	*	*	*
			Yellow	430	410	390	365	340	*	*	*
8RHBCX-3	1/2	4.6	Green	910	890	870	845	820	720	*	*
			Orange	760	745	730	715	700	660	*	*
			Yellow	640	620	600	580	560	530	*	*
			Red	490	470	450	430	410	360	*	*
10RHBCX-3	1/2	4.6	White	1090	1075	1060	1040	1020	960	*	*
			Green	980	960	940	925	910	880	*	*
			Orange	790	765	740	720	700	660	*	*
			Yellow	640	620	600	575	550	510	*	*
12RHBCX-3	1/2	6.2	White	1350	1325	1300	1285	1270	1240	*	*
			Orange	1150	1130	1110	1090	1070	1030	*	*
			Yellow	1060	1045	1030	1010	990	960	*	*
			Red	980	960	940	925	910	880	*	*
115V/1/60 ECM MOTOR RHBCX SERIES (RECESSED) - CFM vs ESP (4-ROW or 3/1 SPLIT)											
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4RHBCX-4	1/7	1.4	White	430	405	380	355	330	*	*	*
			Green	330	305	280	250	220	*	*	*
			Orange	280	250	220	195	170	*	*	*
			Yellow	190	155	120	*	*	*	*	*
6RHBCX-4	1/7	2.5	White	650	635	620	600	580	*	*	*
			Green	610	580	550	540	530	*	*	*
			Orange	520	500	480	455	430	*	*	*
			Yellow	430	410	390	365	340	*	*	*
8RHBCX-4	1/2	4.6	Green	910	890	870	845	820	720	*	*
			Orange	760	745	730	715	700	660	*	*
			Yellow	640	620	600	580	560	530	*	*
			Red	490	470	450	430	410	360	*	*
10RHBCX-4	1/2	4.6	White	1090	1075	1060	1040	1020	960	*	*
			Green	980	960	940	925	910	880	*	*
			Orange	790	765	740	720	700	660	*	*
			Yellow	640	620	600	575	550	510	*	*
12RHBCX-4	1/2	6.2	White	1350	1325	1300	1285	1270	1240	*	*
			Orange	1150	1130	1110	1090	1070	1030	*	*
			Yellow	1060	1045	1030	1010	990	960	*	*
			Red	980	960	940	925	910	880	*	*
115V/1/60 ECM MOTOR RHBCX SERIES (RECESSED) - CFM vs ESP (3/2 SPLIT)											
MODEL	HP	AMPS/ 120V	SPEED TAP	EXTERNAL STATIC PRESSURE (inches of water)							
				0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5
4RHBCX-32	1/7	1.4	White	430	405	380	355	330	*	*	*
			Green	330	305	280	250	220	*	*	*
			Orange	280	250	220	195	170	*	*	*
			Yellow	190	155	120	*	*	*	*	*
6RHBCX-32	1/7	2.5	White	650	635	620	600	580	*	*	*
			Green	610	580	550	540	530	*	*	*
			Orange	520	500	480	455	430	*	*	*
			Yellow	430	410	390	365	340	*	*	*
8RHBCX-32	1/2	4.6	Green	910	890	870	845	820	720	*	*
			Orange	760	745	730	715	700	660	*	*
			Yellow	640	620	600	580	560	530	*	*
			Red	490	470	450	430	410	360	*	*
10RHBCX-32	1/2	4.6	White	1090	1075	1060	1040	1020	960	*	*
			Green	980	960	940	925	910	880	*	*
			Orange	790	765	740	720	700	660	*	*
			Yellow	640	620	600	575	550	510	*	*
12RHBCX-32	1/2	6.2	White	1350	1325	1300	1285	1270	1240	*	*
			Orange	1150	1130	1110	1090	1070	1030	*	*
			Yellow	1060	1045	1030	1010	990	960	*	*
			Red	980	960	940	925	910	880	*	*

ECM MOTOR

In attempt to maintain CFM consistency, fins per inch (FPI) vary depending on coil rows and is reflected in CFM and capacity calculations

INCLUDES 24V TRANSFORMER,
LINE VOLTAGE TERMINAL
BLOCK, LOW VOLTAGE TERMINAL STRIP, IN
FACTORY MOUNTED CONTROL BOX

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

**BLOWER PERFORMANCE
CHBCX 120V ECM**

115V/1/60 ECM MOTOR		CHBCX SERIES (EXPOSED) - CFM (3-ROW)		
MODEL	HP	AMPS/ 120V	SPEED TAP	CFM
4"CHBCX-3	1/7	1.4	White	480
			Green	400
			Orange	350
			Yellow	280
6"CHBCX-3	1/7	2.5	White	690
			Green	660
			Orange	570
			Yellow	480
8"CHBCX-3	1/2	4.6	Green	980
			Orange	800
			Yellow	680
			Red	530
10"CHBCX-3	1/2	4.6	White	1120
			Green	1010
			Orange	830
			Yellow	690
12"CHBCX-3	1/2	6.2	White	1380
			Orange	1180
			Yellow	1080
			Red	1020
115V/1/60 ECM MOTOR		CHBCX SERIES (EXPOSED) - CFM (4-ROW or 3/1 SPLIT)		
MODEL	HP	AMPS/120V	SPEED TAP	CFM
4"CHBCX-4	1/7	1.4	White	480
			Green	400
			Orange	350
			Yellow	280
6"CHBCX-4	1/7	2.5	White	690
			Green	660
			Orange	570
			Yellow	480
8"CHBCX-4	1/2	4.6	Green	980
			Orange	800
			Yellow	680
			Red	530
10"CHBCX-4	1/2	4.6	White	1120
			Green	1010
			Orange	830
			Yellow	690
12"CHBCX-4	1/2	6.2	White	1380
			Orange	1180
			Yellow	1080
			Red	1020
115V/1/60 ECM MOTOR		CHBCX SERIES (EXPOSED) - CFM (3/2 SPLIT)		
MODEL	HP	AMPS/120V	SPEED TAP	CFM
4"CHBCX-32	1/7	1.4	White	480
			Green	400
			Orange	350
			Yellow	280
6"CHBCX-32	1/7	2.5	White	690
			Green	660
			Orange	570
			Yellow	480
8"CHBCX-32	1/2	4.6	Green	980
			Orange	800
			Yellow	680
			Red	530
10"CHBCX-32	1/2	4.6	White	1120
			Green	1010
			Orange	830
			Yellow	690
12"CHBCX-32	1/2	6.2	White	1380
			Orange	1180
			Yellow	1080
			Red	1020

ECM MOTOR

In attempt to maintain CFM consistency, fins per inch (FPI) vary depending on coil rows and is reflected in CFM and capacity calculations

INCLUDES 24V TRANSFORMER,
LINE VOLTAGE TERMINAL
BLOCK, LOW VOLTAGE TERMINAL STRIP, IN
FACTORY MOUNTED CONTROL BOX

GUIDE SPECIFICATIONS

PART 1: GENERAL

1.01 Section Includes

A. Fan Coil Units

1.02 REFERENCES

AMCA 99 – Standards Handbook

AMCA 210 -- Laboratory Methods for Testing Fans for Rating Purposes

AMCA 300 – Test Code for Sound Rating Air Moving Devices

ARI 440 – Room Fan-Coil Unit

ASTMB117 – Standard Practice for Operating Salt Spray Apparatus

NEMA MGI – Motors and Generators

NFPA 70 – National Electric Code

SMACNA – HVAC Duct Construction Standards – Metal and Flexible

UL 723 – Test for Surface Burning Characteristics of Building Materials

UL 900 – Test Performance of Air Filter Units

UL 1995 – Standard for Heating and Cooling Equipment

UL 94 – Test for Flammability of Plastic Materials for Parts in Devices and Appliances

1.03 SUBMITTALS

A. Shop drawings: Indicate assembly, unit dimensions, weight loading, required clearances, construction details, field connection details, and electrical characteristics and connection requirements. A computer generated capacity selection shall be submitted for each cooling coil with design points and final operating point clearly noted.

B. Product Data:

1. Provide literature that indicates dimensions, weights, capacities, ratings, fan performance, finishes of materials, and electrical characteristics and connection requirements.

2. Provide data of filter media, filter performance data.

3. Manufacturer's installation instructions.

1.04 OPERATION AND MAINTENANCE DATA

A. Maintenance Data: Include instructions for lubrication, filter replacement and motor and drive replacement.

1.05 QUALIFICATIONS

A. Manufacturer: Company specializing in manufacturing the products specified in this section with a minimum 10 years documented experience, which issues complete catalog data on total product.

1.06 DELIVERY, STORAGE, AND HANDLING

A. Accept products on site on factory-installed shipping skids. Inspect for damage.

B. Store in clean dry place and protect from weather and construction traffic. Handle carefully to avoid damage to components, enclosures, and finish.

GUIDE SPECIFICATIONS (cont.)

1.07 ENVIRONMENTAL REQUIREMENTS

A. Do not operate units for any purpose, temporary or permanent, until ductwork is clean, filters are in place, and fan has been test run under observation.

PART 2: PRODUCTS

2.01 MANUFACTURERS

A. The following manufacturers are approved for use. No substitutions will be permitted.

1. AE-Air, Dallas TX

2.02 CASING

A. Unit shall have corrosion resistant casing consisting of galvanized steel panels. Unit panels shall be fully insulated with 1.5lb fiberglass insulation with anti-microbial agent. Removable panels shall provide full access to unit components.

B. Drain pans shall be heavy gauge galvanized steel with an insulating coating. Optional stainless steel drain pan shall include an insulating coating. Drain pans shall be removable for cleaning or replacement without removing coils or disturbing coil connections.

2.03 SUPPLY FAN

A. Provide DWDI forward-curved supply fans. Fan assemblies shall be statically and dynamically balanced by manufacturer. The housings are constructed from heavy gauge galvanized steel with die-formed inlet cones.

B. Fan and motor mounting platform shall be a minimum of 12 gauge LFG galvanized steel.

2.04 MOTORS

A. Direct drive motors to be PSC or ECM type, permanently lubricated type with internal thermal overload protection and mounted with rubber isolation bushings.

2.05 ELECTRICAL

A. Provide units with 115, 208-230, or 277V, 3-speed with 24v control transformer, and 15 amp service switch or optional ECM motor with 120/24V control transformer, 15 amp service switch, 4 speed taps. Controls to be factory mounted and tested.

2.07 COOLING AND HEATING COIL SECTIONS

A. Provide access to coils for service and cleaning.

B. Water Coils: fins shall have full drawn collars to provide a continuous surface cover over the entire tube for maximum heat transfer. Tubes shall be mechanically expanded into the fins to provide a continuous primary-to-secondary compression bond over the entire finned length for maximum heat transfer rates. Bare copper tube shall not be visible between fins. Coil tubes shall be seamless copper, expanded into fins, and brazed at joints. Coil connections shall be copper with sweat connection size to be determined by manufacturer based upon the most efficient coil circuiting. Manual air vent connections shall be provided at the highest point to assure proper venting. Coils shall be tested with 350 pounds air pressure and suitable for 300 psig working pressure. Coil casings shall be a formed channel frame of galvanized steel.

2.08 FILTERS

A. Filter to be disposable type and media shall be UL 900 listed, Class I or Class II.

PART 3: EXECUTION

3.01 INSTALLATION

A. Install in accordance with manufacturer's instructions.

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

ACCESS PANELS



*STANDARD PANEL OPTIONS FOR HBC SERIES					*IAQ MERV 8 PANEL OPTIONS FOR HBC SERIES				
PART #	UNIT SIZE	PANEL TYPE	FRAME DIMENSIONS	*FILTER SIZE	PART #	UNIT SIZE	PANEL TYPE	FRAME DIMENSIONS	*FILTER SIZE
965	3,4,5,6	LOUVERED	27-1/2 X 43	20X20X1 (1)	965-M8	3,4,5,6	LOUVERED	27-1/2 X 43	20X30X1 (1)
965-1		SOLID							
966	8	LOUVERED	27-1/2 X 49	20X20X1 (1)	966-M8	8	LOUVERED	27-1/2 X 49	20X20X1 (2)
966-1		SOLID							
967	10	LOUVERED	27-1/2 X 55-1/2	20X20X1 (1)	967-M8	10	LOUVERED	27-1/2 X 55-1/2	20X20X1 (2)
967-1		SOLID							
967-4	12/13	LOUVERED	27-5/8 X 70-1/8	10X65X1 (1)	967-8M8	12/13	LOUVERED	27-5/8 X 70-1/8	20X30X1 (2)
967-5		SOLID							



Note * Filters not included

IAQ PANEL PERFORMANCE DATA (4) (Clean Filter)										
	CFM									
	500	600	700	800	900	1000	1100	1200	1300	1500
965-M8 with AF20301HV (20x030, Merv 8) Filters (2)	0.04	0.06	0.06	0.08	0.09	0.10	---	---	---	---
966-M8 with AF20201HV (20x020, Merv 8) Filters (2)	0.04	0.06	0.06	0.08	0.09	0.10	---	---	---	---
967-M8 with AF20201HV (20x020, Merv 8) Filters (2)	---	0.05	0.05	0.07	0.08	0.10	---	---	---	---
967-6-M8 with AF20251HV (20x025, Merv 8) Filters (2)	---	---	---	0.05	0.06	0.07	0.08	0.09	---	---
967-8-M8 with AF20301HV (20x30, Merv 8) Filters (2)	---	---	---	---	---	0.06	0.06	0.08	0.08	0.10




Notes:

- (1) The above is the actual laboratory test data or these panels.
- (2) Glassfloss® Industries HV series Merv 8 filters were used to generate above data (**filters must be field supplied**)
- (3) Alternate Merv 8 filters would be acceptable provided they have equal or less resistance.
- (4) Refer to fan coil specification sheets for fan coil blower data.

THERMOSTATS

<p>T420 - Manual Changeover with 3 speed fan switch</p> <p>T421 - Auto Changeover with 3 speed fan switch</p>	<p>3-Speed Fan Switching</p> 	<p>HEAT-OFF-COOL System Switch Accepts 24 to 277 VAC., 50 or 60 Hz Maximum Ambient: 130^o F Optional Remote Thermistor Probe Set Point Range: 50 to 90^o F Agency Approvals: UL, UL Canada CE Mounting: Installs to a standard 2" x 4" devise box</p>
<p>T200 - Manual Changeover with Digital Display with Auto Speed Fan Switch</p> <p>T201 - **Auto Changeover Digital Display with Auto Speed Fan Switch</p>	<p>3-Speed Fan Switching</p> 	<p>HEAT/COOL System Switch, Manual or Auto 3-Speed Fan switch with Auto Speed Feature Separate On-Off Switch 18-30 VAC, 50/60 Hz Temperature Accuracy: ± 1.8^o F Ambient Teperature: 50-122^o F Set Point Range: 64-88^o F</p>

SINGLE SPEED THERMOSTATS

<p>T630 - Manual Changeover Digital Display, Single Speed Fan</p>	<p>1-Speed Fan (on-Auto)</p> 	<p>HEAT-OFF-COOL System Switch Manual Changeover 18-30 VAC, 50/60 Hz Temperature Accuracy: ± 1.0^o F Ambient Temperature: 14^o to 140^o F Set Point Range: 45-90^o F DC Power: 3.0 Volt DC (2 AA Alkaline batteries included)</p>
<p>T832 7-Day Programmable 1 heat, 1 cool, Single Speed, Touch Screen display, C7189 Remote sensor available</p>	<p>1-Speed Fan (On-Auto)</p> 	<p>HEAT-OFF-COOL-AUTO Fan Options: Auto-on Circ 20 - 30 Vac, 50/60 Hz Ambient Temperature: 0^o to 120^o F Set Point Range: Clg. 50^oF to 99^oF Htg. 40^of to 90^oF Powering methods: Battery only Common wire only Common wire with battery backup</p>
<p>T4071 5/8 T4072 7/8 Auto Changeover Requires Aquastat (2-pipe applications)</p>		<p>Strap-on Aquastat 5/8" O.D. Tubing 10 amps induction 60 amps locked rotor 25 amps resitive Temperature Changes at 95^o F + 10^oF Resets at 65^oF + 5^oF</p>

Product Specifications


Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

ACCESSORIES


3-SPEED ROTARY SWITCH

W/OFF POSITION	E332		<p>Resistive Load (Switching Capacity) Rating 10 Amps at 125 VAC 5 Amps at 250/277 VAC</p> <p>Inductive (Motorload) Ratings 1/4 HP at 125/277 VAC 1/2 HP at 250 VAC</p> <p>Standard Switch and Shaft Dimensions 2" x 1-1/2" x 11/16" 3/16" Square Shaft with 13/32" Extension 15/32" Double D 32 Threaded Bushing with 1/4" Extension 6-1/2" Long Leads</p>
NO OFF POSITION	E332-1		


WALL MOUNT 3-SPEED SWITCH

3-SPEED SWITCH ON/OFF WALL MOUNT	T422		<p>Resistive Load (Switching Capacity) Rating 6 Amps at 125 VAC 5 Amps at 240 VAC 4.2 Amps at 277 VAC</p> <p>Inductive (Motorload) Ratings 1/4 HP at 125/277 VAC 1/2 HP at 250 VAC</p> <p>Horizontal mount with manual on/off switch and manual three speed fan switch. Operation with system switch in on position, fan operation is continuous, can be set at one of three speeds. With system switch in off position, all outputs are off.</p>
----------------------------------	------	---	---

OPTIONAL SERVICE SWITCH (15 AMP)

<table border="1"> <tr> <th>Voltage</th> <th>Part #</th> </tr> <tr> <td>120/1/60</td> <td>945-6</td> </tr> <tr> <td>240/1/60</td> <td>945-7</td> </tr> <tr> <td>277/1/60</td> <td>945-7</td> </tr> <tr> <td>220/1/50</td> <td>945-7</td> </tr> </table>	Voltage	Part #	120/1/60	945-6	240/1/60	945-7	277/1/60	945-7	220/1/50	945-7		<p>2 x 4 Service Switch Toggle Switch 15 Amp Single Pole 2 X 4 J-Box 2 X 4 Switch Cover - Galvanized Steel</p>
Voltage	Part #											
120/1/60	945-6											
240/1/60	945-7											
277/1/60	945-7											
220/1/50	945-7											

SINGLE SPEED FAN (24V Control Circuit)

<table border="1"> <tr> <th>Voltage</th> <th>Part #</th> </tr> <tr> <td>120/1/60</td> <td>310-E301</td> </tr> <tr> <td>240/1/60</td> <td>310-E302</td> </tr> <tr> <td>277/1/60</td> <td>310-E303</td> </tr> <tr> <td>220/1/50</td> <td>310-E302</td> </tr> </table>	Voltage	Part #	120/1/60	310-E301	240/1/60	310-E302	277/1/60	310-E303	220/1/50	310-E302		<p>Relay Transformer Assembly 30 Amp, single pole, normally open, 24v coil 18 GA. 4.25 X 4.25 mounting plate Factory assembled and wired</p>
Voltage	Part #											
120/1/60	310-E301											
240/1/60	310-E302											
277/1/60	310-E303											
220/1/50	310-E302											

THREE SPEED FAN (24V Control Circuit)











Multi-24		<p>3-SPEED CONTROL OPTION FOR HBC SERIES FAN COILS FACTORY MOUNTED CONTROLS INCLUDE CB500 RELAY BOARD, 24V TRANSFORMER, (15 AMP) SERVICE SWITCH</p>
FACTORY MOUNTED OPTION ONLY		

Product Specifications

Horizontal Fan Coils
2-Pipe/4-Pipe Hydronic

ACCESSORIES

VALVE PACKAGES AND ACCESSORIES

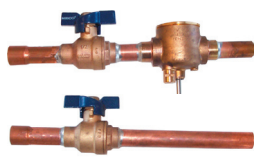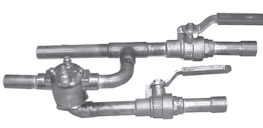
ACTUATOR		 <p>2-Way Valve and Actuator</p>	ACTUATOR MATERIALS				
2-POSITION (ON-OFF) 50/60HZ			BASE	POLYCARBONATE	APPROVALS		
VOLTAGE	PART #		COVER	POLYCARBONATE	UL Cul CE		
24V	E50131180		BASE PLATE	ALUMINUM			
120/1/60	E50132180		LEAD LENGTH	6" - (24V 18")			
240/1/60	E50138180		POWER REQUIREMENTS	6.5W, 7 VA			
277/1/60	E50137180		AMBIENT TEMPERATURE RANGE	32 TO 170 F			
220/1/50	E50138180		MICRO SWITCH	5 A, 250 V			
		HUMIDITY	95% NON-CONDENSING				
VALVE BODY MATERIALS			VALVE BODIES (2-POSITION)				
BODY		BRASS	E43XXXX 3-WAY		E42XXXX 2-WAY		
STEM		STAINLESS STEEL					
TWO O-RINGS SEALS		EPDM					
PADDLE		EPDM					
FLUID		WATER/GLYCOL					
MAXIMUM % OF GLYCOL		50%	VALVE PACKAGE ACCESSORIES				
TEMPERATURE RANGE		32 TO 240	Automatic Fixed Flow Control		Manual Adj. Flow Setter		
MAXIMUM STATIC PRESSURE		300 PSI	1/2"	3/4"			
SWEAT CONNECTION		1/2", 3/4", 1"	CP654XXXXX	CP655XXXXX	1/2"	3/4"	
FLOW CHARACTERISTICS					CP601	CP6011	
Connection Size	Flow Coefficient	Maximum Close-Off Pressure AP	PETE'S PLUG	Requires CP6025 CP61712			
1/2"	1.0 Cv	75	Ball Valves (Sweat)				
1/2"	2.5 Cv	50	Full Port (T-Handle)			Y-Strainer (Sweat)	
3/4"			1/2"	3/4"	1"	1/2"	3/4"
1/2"	3.5 Cv	30	CP-9	CP-90	CP-905	CP603	CP6031
3/4"							
3/4"	5 Cv	25	EXTENDED DRIP LIPS				
1"							919-1 15"
3/4"	7.5 Cv	20					919-1X1ss 15"
1"			919-1EXT 19"				
1"	8 Cv	20	STANDARD VALVE PACKAGE FACTORY MOUNTED 2-POSITION (ON-OFF)				
			2-WAY 9VH*22BM WITH 2-BV'S				
			3-WAY 9VH*23BM WITH 2-BV'S				

PIPING PACKAGE OPTIONS
TWO POSITION, MODULATING


Manual air vents are standard and are factory mounted on all chilled water and hot water coils.

All pre-piped on/off or modulating valve packages are factory assembled with sweat connections.


Ball Valves only, No Control Valve

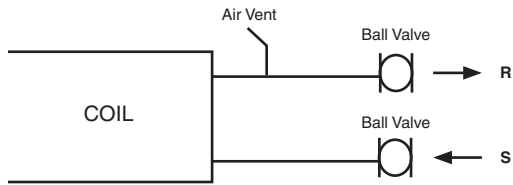


3-Way Valve, with 2-Ball Valves

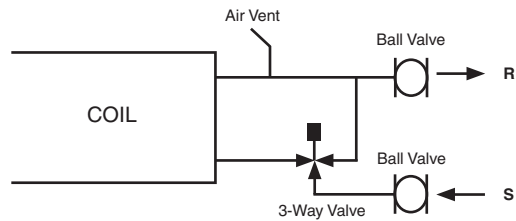


2-Way Valve, No Ball Valves

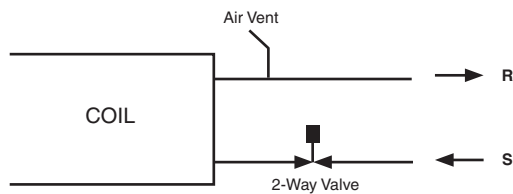


3-Way Valve, with 2-Ball valve and Manual Circuit Setter or Automatic Flow Control, Y-Strainer, PT's

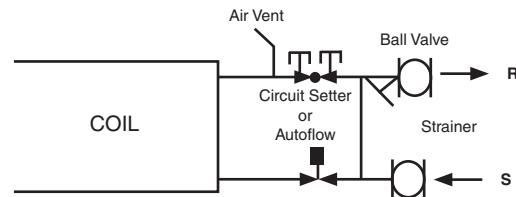


2-Way Valve with 2-Ball Valves

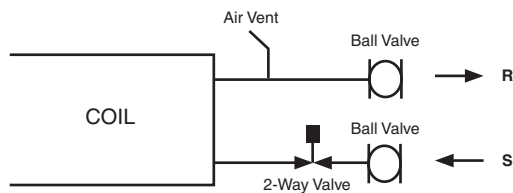

3-Way Valve, No Ball Valves

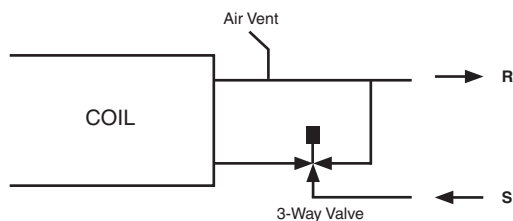

3-Way Valve with 2-Ball Valves and Aquastat

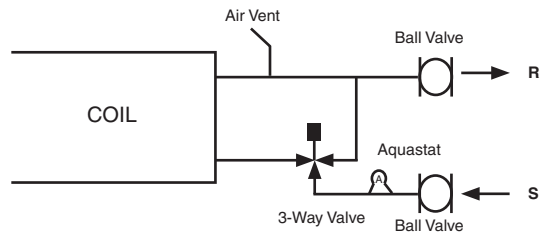

Add Options:
Y-Strainers, Pete's Plugs, Cleanout Blow-down, SS hose kits, Aqua Stats


Additional options and configurations may be available. Contact factory for availability.

Valve packages are available as kits or factory mounted on certain products. Contact factory for availability.

LOW VOLTAGE 24V CONTROLS

2-PIPE SYSTEM


MODEL	PART # SUFFIX
HBC	450XXX-MNQ
PHBC	500XXX-MNQ
RHBC	480XXX-MNQ
CHBC	490XXX-MNQ
VOLTAGE CODE-SUFFIC	
120/24V	M
240/24V	N
277/24V	Q
W / 24V CONTROLS	

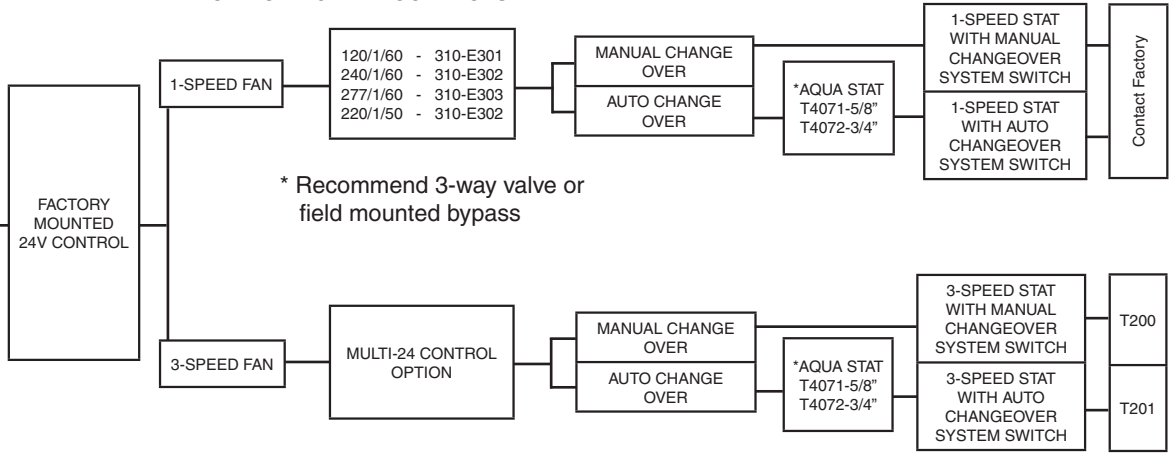

LINE VOLTAGE 120/240/277V CONTROLS

2-PIPE SYSTEM


MODEL	PART # SUFFIX
HBC	450XXX-O
PHBC	500XXX-O
RHBC	480XXX-O
CHBC	490XXX-O
NO 24V CONTROLS	

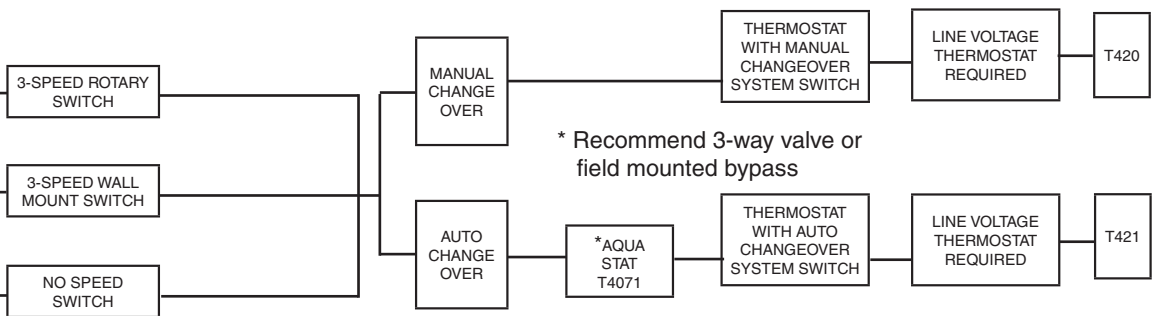

LOW VOLTAGE 24V CONTROLS

4-PIPE SYSTEM

MODEL	PART # SUFFIX
HBC	450XXX-MNQ
PHBC	500XXX-MNQ
RHBC	480XXX-MNQ
CHBC	490XXX-MNQ
VOLTAGE CODE-SUFFIC	
120/24V	M
240/24V	N
277/24V	Q
W / 24V CONTROLS	

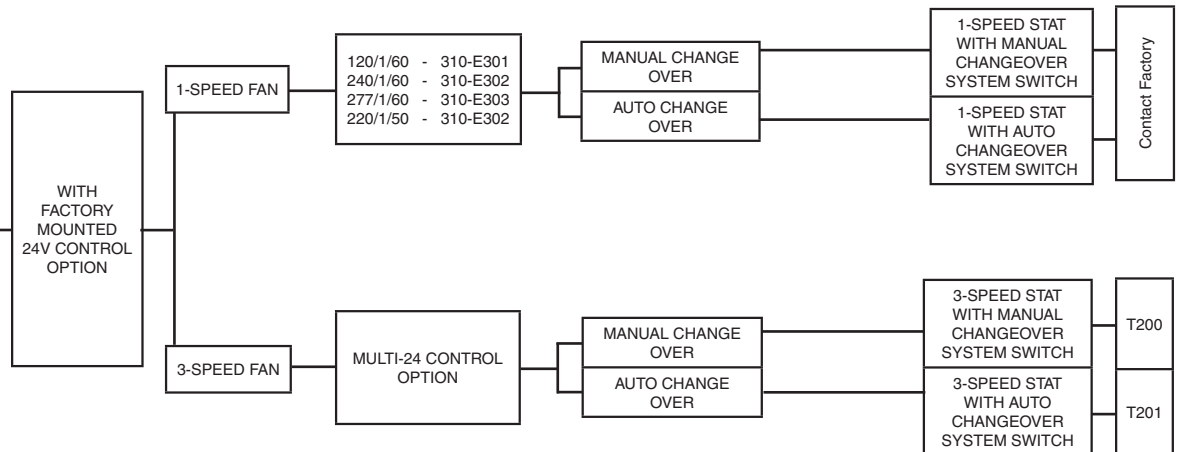

LINE VOLTAGE 120/240/277V CONTROLS

4-PIPE SYSTEM

MODEL	PART # SUFFIX
HBC	450XXX-O
PHBC	500XXX-O
RHBC	480XXX-O
CHBC	490XXX-O
NO 24V CONTROLS	

